DAIKIN

altherma

Daikin Altherma 3

Product catalogue 2018

Setting the new heat pump standard

EHB(H/X)-D

BRP069A61/62

ERGA-D(A)
EHVH-D(-/G)

Table of contents

Supporting tools 4

Daikin Altherma 3 R-32 6

Bluevolution floor standing unit 8
EHVH-D6V(G)/D9W(G) + ERGA-DV3 10
EHVX-D3V(G)/D6V(G)/D9W(G) + ERGA-DV3 11
EHVZ-D6V(G)/D9W(G) + ERGA-DV3 12
EHVH-DV(G) + ERGA-DV3 13
Options 14

Bluevolution integrated ECH2O unit 16
EHSH-D + ERGA-DV3 18
EHSHB-D + ERGA-DV3 19
EHSX-D + ERGA-DV3 20
EHSXB-D + ERGA-DV3 21
Options 22

Bluevolution wall mounted unit 24
EHBH-D6V/D9W + ERGA DV3 26
EHBX-D6V/D9W + ERGA-DV3 27
Options 28

Thermal stores and tanks 30
EKHWP-B/EKHWP-PB 32
EKHWS(U)-D 33

Always in control 34
EKRUDAS 35
EKRTR/EKRTW 36

Low sound cover 37

Combination table 38

Supporting tools

Heating Solutions Navigator

HSN provides the best fit solution for your customers home:

› User-friendly interface showcases the wide array of Daikin Heating Solutions available
› Estimation of the required heat load from a simple intuitive approach to a deeper detailed room-by-room calculation
› Country specific elements are taken into account
› Create custom made piping & wiring diagrams
› Link to flue gas selection tool for gas based solutions
› Set the configuration of your installation
› Overview of all the options specifically for your installation
› Quick link to the installation specific literature
› Compare economic and ecological benefit of the Daikin solution against a conventional heating installation.
› Storage of all your leads on you Stand By Me account
› Easy conversion from lead to installation to invite your end user for extra after-sales services

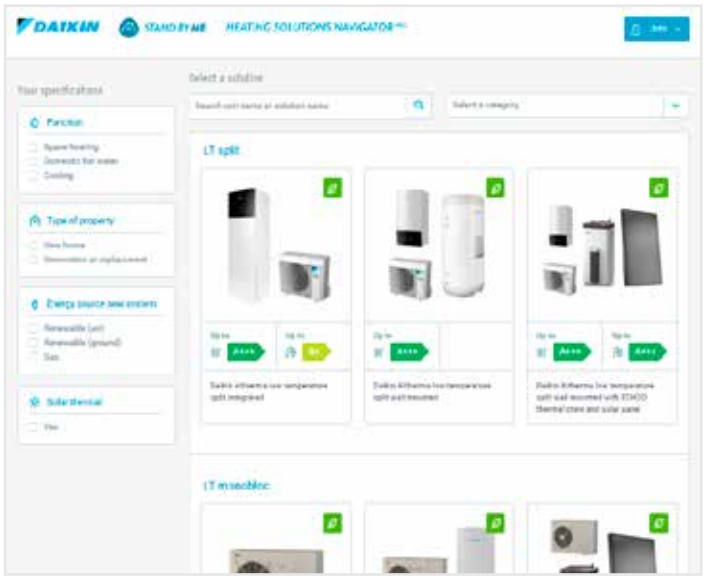

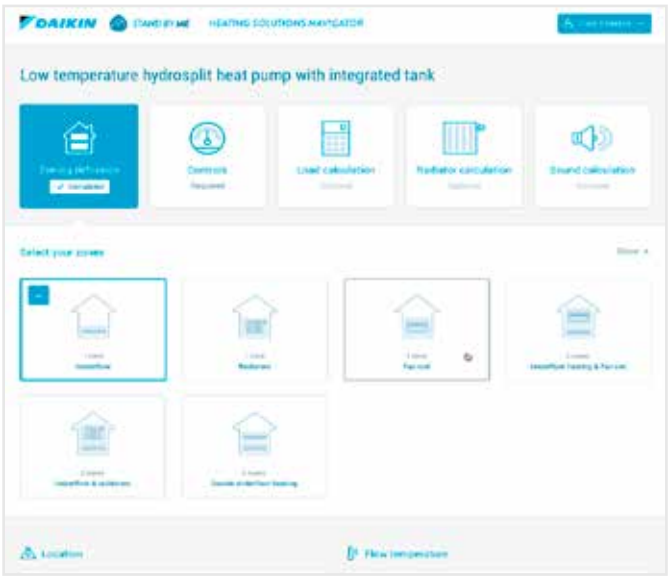

Want to know more about our Heating Solutions Navigator?

› Have a look at your video on YouTube!

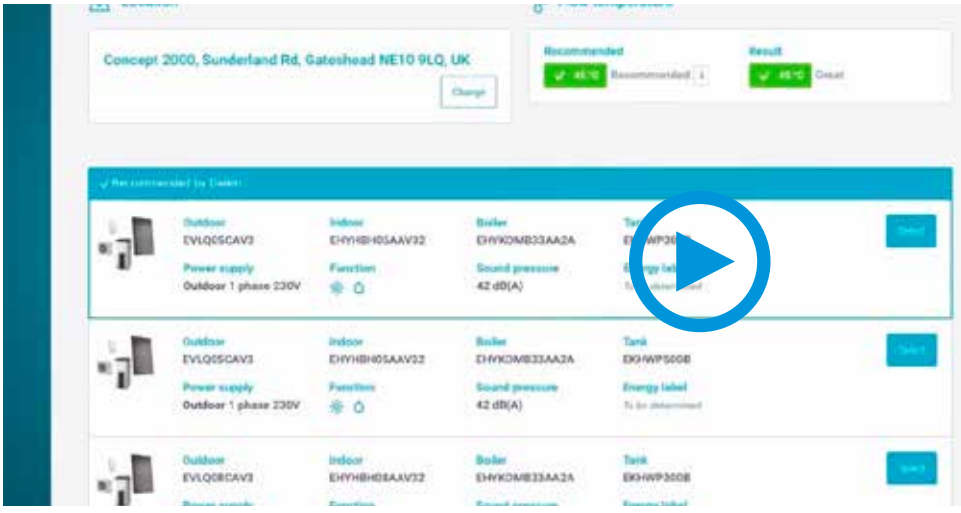

Stand By Me, my climate of security

With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market.

After-sales services

Stand By Me offers after-sales services such as warranty extensions and maintenance contracts:

- ☑ warranty extension on parts and/or labour
- ☑ starts on commissioning date

Quick follow-up by Daikin service partners

Daikin service partners are automatically linked with their customer after registration on **www.standbyme.daikin.eu**. A notification is sent when a customer purchases a maintenance contract.

Your customer is guaranteed:

- ☑ quick and reliable service
- ☑ complete installation logbook including registration documents, maintenance deadlines, repair reports etc.

Key account portal

The key account portal is the perfect solution for large accounts:

- ☑ keep track of all your installations
- ☑ project management
- ☑ remote metering (UK only)

› For more details about the Stand By Me services in your country, contact your local Daikin office.

Business portal

- › Learn more about Daikin's units on our extranet portal: **my.daikin.eu**
- › Receive information in a matter of seconds using our powerful search tool
- › Customise search options to only see information that is relevant for you
- › Accessible via a mobile device or computer

my.daikin.eu

E-care app NEW

All-in-one app for the dealer

- › Register your installation on Stand By Me via simple **QR code** scanning
- › Quick configuration of your heat pump in **only 7 steps**
- › Diagnosis of malfunction by QR code scanning and error code input

Daikin Altherma 3

powered by Bluevolution with R-32 refrigerant

Why choose **Daikin Altherma 3?**

Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R32.

High performance

› Delivering temperatures up to 65°C at high efficiency, the R32 Daikin Altherma 3 is suitable for both underfloor heating and radiators and retains its pedigree trademark in frost protection down to -25°C, ensuring reliable operation even in the coldest climates.
› The optimal combination of Bluevolution technology offers the highest performance:
  » seasonal efficiency up to A+++
  » heating efficiency up to a COP of 5,1 (at 7°C/35°C)
  » Domestic hot water efficiency up to COP of 3,3 (EN16147)
› Available in 4, 6 and 8 kW

Easy to install

› Delivered ready to work: all key hydraulic elements are already factory mounted
› The new design enables that all servicing can be done from the front and all piping can be accessed at the top of the unit
› Stylish modern outlook
› The outdoor unit is tested and charged with refrigerant, installation time is reduced

Easy commissioning :

› Integrated high resolution colour interface
› Quick wizard allowing commissioning in maximum 9 easy steps to have the full system ready to work
› Next to that the configuration can take place remotely to upload later on the unit after the day of the installation.

Easy to control

› The combined effect of the Daikin Altherma weather dependent set-point controls and its inverter compressors maximises the efficiency of the new R32 Daikin Altherma 3 at each outdoor temperature, assuring consistent room temperatures at all times.
› To control on a daily basis your home temperature, settings can be done anywhere at any time via the Daikin Online Controller app. This online controller allows adjustment of home comfort levels to suit individual preferences while achieving further energy efficiencies. The R32 Daikin Altherma 3 range can also be fully integrated with other home control systems

Control via app

Daikin Altherma 3
offers a wide range to adapt to your customers needs

- **Best seasonal efficiencies** providing the highest savings on running costs
- Perfect fit for **new builds**, as well as for low energy houses
- A leaving water temperature up to 65°C makes it also **a perfect choice for refurbishments**

To cover all applications, the R32 Daikin Altherma 3 is available in

3 different indoor units

Floor standing unit with integrated domestic hot water tank

Compact and yet 100 % comfort guaranteed
› All components and connections are factory mounted
› Very small 600 x 600 installation footprint required
› Minimum electrical input with constantly available hot water
› Dedicated bi-zone models available: two temperature zones automatically regulated by the same indoor unit
› Modern stylish design available in white or silver-grey

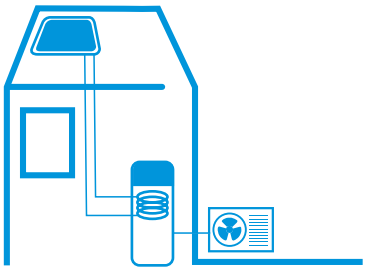

Floor standing unit with integrated ECH$_2$O tank

Integrated solar unit and domestic hot water tank
Maximising renewable energy with top comfort for hot water preparation
› Solar support for domestic hot water
› Lightweight plastic tank
› Bivalent option: can be combined with a secondary heat source
› App control available



Wall mounted unit

High flexibility for installation and domestic hot water connection
› Compact unit with small installation (almost no side clearance is required)
› Can be combined with a space separate domestic hot water tank up to 500 litres, with or without solar support
› Stylish modern design

DESIGN AWARD 2018

reddot award 2018 winner

R-32

BLUEVOLUTION

Daikin Altherma 3 floor standing unit

with integrated domestic hot water tank

Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for new build and low energy houses.

All in one system to save installation space and time

- A combined stainless steel domestic hot water tank of 180 or 230 L and heatpump ensures a faster installation compared to traditional systems.
- Inclusion of all hydraulic components means no third party components are required.
- PCB board and hydraulic components are located in the front for easy access
- Small installation footprint of 600 x 600 mm
- Integrated back-up heater choice of 3, 6, 9 kW aswell as back-up heater less models are available
- Dedicated bi-zone models allowing temperature monitoring for 2 zones connect underfloor heating to radiators for optimise efficiency

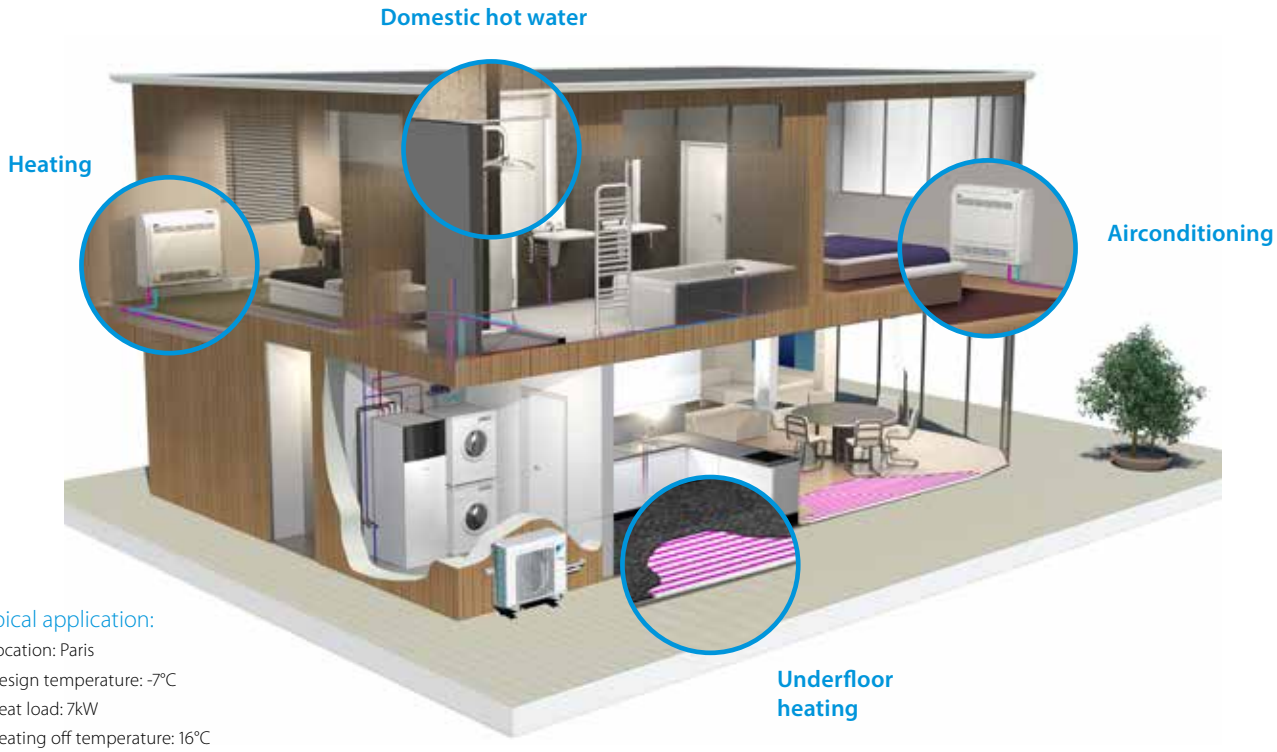

Typical application:

- Location: Paris
- Design temperature: -7°C
- Heat load: 7kW
- Heating off temperature: 16°C

All-in one design

Reduces the installation footprint and height

Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 600 x 600 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1,65 m for an 180 L tank and 1,85 m for a 230 L tank, the required installation height is less than 2m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.

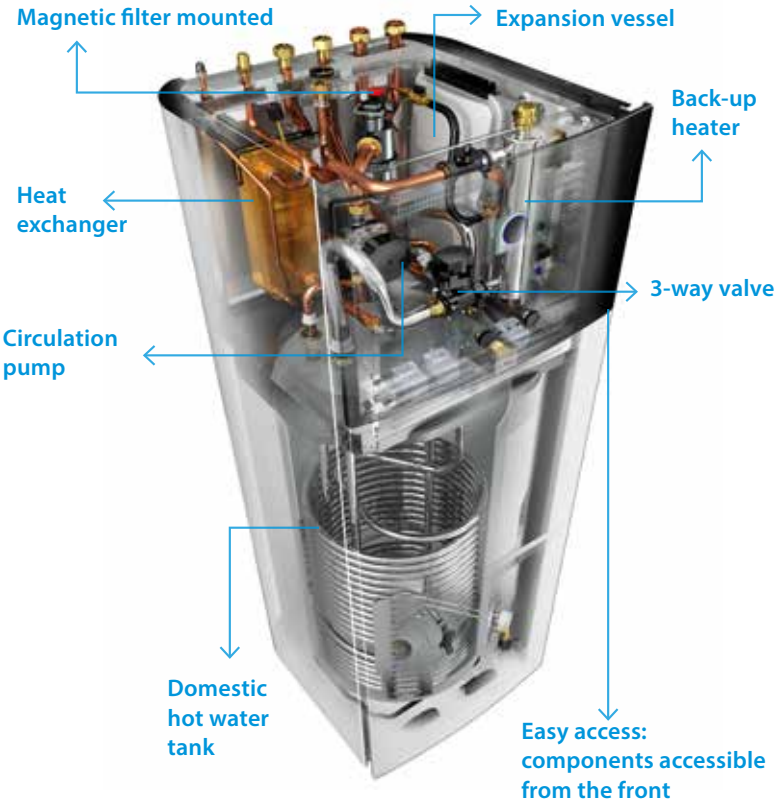

Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.

Blue is perfect! Should the eye turn red, an error has occured.

Quick to configure

Log in and you'll be able to completely configure the unit via the new MMI in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

Easy operation

Work super-fast with the new MMI. It's super easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The MMI was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

Integrated indoor unit

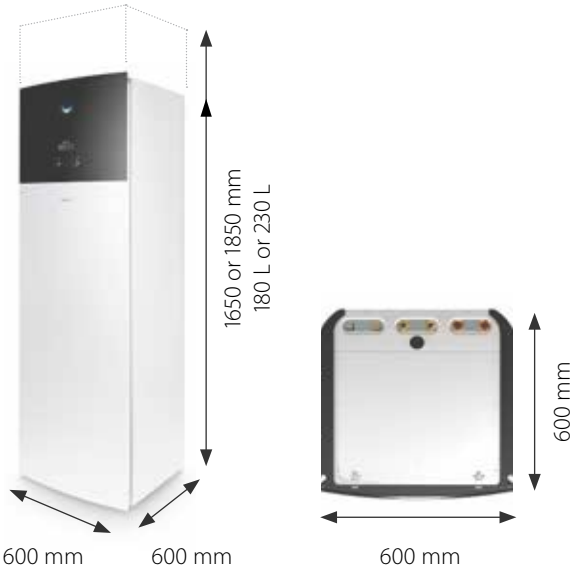

Daikin Altherma 3 low temperature split integrated floor standing unit

Floor standing air to water heat pump for **heating and hot water**; ideal for low energy houses

- A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Small installation footprint of 595 x 600 mm
- Integrated back-up heater choice of 6 or 9 kW
- Outdoor unit extracts heat from the outdoor air, even at -25°C

EHVH-D6V EHVH-D6VG

ERGA-DV

011-1W0218 → 222
011-1W0245, 247
011-1W0249 → 251

A+++ A+ 65°C R-32

(3)

Efficiency data				EHVH + ERGA	04S18D6V(G)+ 04DV	04S23D6V(G) + 04DV	08S18D6V(G)/D9W(G) + 06DV	08S23D6V(G)/D9W(G) + 06DV	08S18D6V(G)/D9W(G) + 08DV	08S23D6V(G)/D9W(G) + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.850 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26				3.32	
			ηs (Seasonal space heating efficiency)	%	127				130	
			Seasonal space heating eff. class		A++					
	Average climate water outlet 35°C	General	SCOP		4.48		4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176				179	
			Seasonal space heating eff. class		A+++ (3)					
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	ηwh (water heating efficiency)		%	125	133	125	133	125	133
		Water heating energy efficiency class			A+					

Indoor Unit				EHVH	04S18D6V(G)	04S23D6V(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)
Casing	Colour				White + Black					
	Material				Resin / Sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625
Weight	Unit			kg	131	139	131	139	131	139
Tank	Water volume			l	180	230	180	230	180	230
	Maximum water temperature			°C	60					
	Maximum water pressure			bar	10					
	Corrosion protection				Pickling					
Operation range	Heating	Ambient	Min.~Max.	°C	5~30					
		Water side	Min.~Max.	°C	15 ~65					
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35					
		Water side	Max.	°C	60					
Sound power level	Nom.			dBA	42					
Sound pressure level	Nom.			dBA	28					

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth	mm		740x884x388		
Weight	Unit		kg		58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling	Min.~Max.	°CDB		10~43		
	Domestic hot water	Min.~Max.	°CDB		-25~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge		kg		1.50		
	Control				Expansion valve		
Sound power level	Heating	Nom.	dBA		58	60	62
	Cooling	Nom.	dBA		61	62	
Sound pressure level	Heating	Nom.	dBA		44	47	49
	Cooling	Nom.	dBA		48	49	50
Power supply	Name/Phase/Frequency/Voltage		Hz/V		V3/1N~/50/230		
Current	Recommended fuses		A		25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Small installation footprint of 595 x 600 mm
- Integrated back-up heater choice of 3, 6, 9 kW
- Outdoor unit extracts heat from the outdoor air, even at -25°C

011-1W0218 → 222
011-1W0245, 247
011-1W0249 → 251

A+++ A+ 65°C R-32

(3)

Efficiency data				EHVX + ERGA	04S18D3V(G)/ D6V(G) + 04DV	04S23D3V(G)/ D6V(G) + 04DV	08S18D6V(G)/ D9W(G) + 06DV	08S23D6V(G)/ D9W(G) + 06DV	08S18D6V(G)/ D9W(G) + 08DV	08S23D6V(G)/ D9W(G) + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0,850 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)		5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0,940 (1) / 1.14 (2)		1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)		5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26				3.32	
			ηs (Seasonal space heating efficiency)	%	127				130	
			Seasonal space heating eff. class		A++					
	Average climate water outlet 35°C	General	SCOP		4.48		4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176				179	
			Seasonal space heating eff. class		A+++(3)					
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	ηwh (water heating efficiency)		%	127	134	125	133	125	133
		Water heating energy efficiency class			A+					

Indoor Unit				EHVX	04S18D3V(G)/D6V(G)	04S23D3V(G)/D6V(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)
Casing	Colour				White + Black					
	Material				Resin / Sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625
Weight	Unit			kg	131	139	131	139	131	139
Tank	Water volume			l	180	230	180	230	180	230
	Maximum water temperature			°C	60					
	Maximum water pressure			bar	10					
	Corrosion protection				Pickling					
Operation range	Heating	Ambient	Min.~Max.	°C	5~30					
		Water side	Min.~Max.	°C	15 ~65					
	Cooling	Ambient	Min.~Max.	°CDB	5~35					
		Water side	Min.~Max.	°C	5~22					
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35					
		Water side	Max.	°C	60					
Sound power level	Nom.			dBA	42					
Sound pressure level	Nom.			dBA	28					

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.	°CDB	10~43		
	Domestic hot water		Min.~Max.	°CDB	-25~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating		Nom.	dBA	58	60	62
	Cooling		Nom.	dBA	61	62	
Sound pressure level	Heating		Nom.	dBA	44	47	49
	Cooling		Nom.	dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split integrated bi-zone

Floor standing integrated with **two different temperature zones monitoring**

- A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Small installation footprint of 595 x 600 mm
- Integrated back-up heater choice of 6 or 9 kW
- Outdoor unit extracts heat from the outdoor air, even at -25°C

011-1W0218 → 222

A+++ A+ 65°C R-32

(3)

Efficiency data				EHVZ + ERGA	04S18D6V(G) + 04DV	08S18D6V(G)/D9W(G) + 06DV	08S23D6V(G)/D9W(G) + 06DV	08S18D6V(G)/D9W(G) + 08DV	08S23D6V(G)/D9W(G) + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.850 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP			3.26		3.32	
			ηs (Seasonal space heating efficiency)	%		127		130	
			Seasonal space heating eff. class			A++			
	Average climate water outlet 35°C	General	SCOP		4.48	4.47		4.56	
			ηs (Seasonal space heating efficiency)	%		176		179	
			Seasonal space heating eff. class			A+++ (3)			
Domestic hot water heating	General	Declared load profile				L	XL	L	XL
	Average climate	ηwh (water heating efficiency)		%		125	133	125	133
		Water heating energy efficiency class				A+			

Indoor Unit				EHVZ	04S18D6V(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)
Casing	Colour					White + Black			
	Material					Resin / Sheet metal			
Dimensions	Unit	HeightxWidthxDepth		mm		1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625
Weight	Unit			kg		136	144	136	144
Tank	Water volume			l		180	230	180	230
	Maximum water temperature			°C		60			
	Maximum water pressure			bar		10			
	Corrosion protection					Pickling			
Operation range	Heating	Ambient	Min.~Max.	°C		5~30			
		Water side	Min.~Max.	°C		15 ~65			
	Domestic hot water	Ambient	Min.~Max.	°CDB		5~35			
		Water side	Max.	°C		60			
Sound power level	Nom.			dBA		42			
Sound pressure level	Nom.			dBA		28			

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm		740x884x388	
Weight	Unit			kg		58.5	
Compressor	Quantity					1	
	Type					Hermetically sealed swing compressor	
Operation range	Cooling	Min.~Max.		°CDB		10~43	
	Domestic hot water	Min.~Max.		°CDB		-25~35	
Refrigerant	Type					R-32	
	GWP					675.0	
	Charge			kg		1.50	
	Control					Expansion valve	
Sound power level	Heating	Nom.		dBA	58	60	62
	Cooling	Nom.		dBA	61	62	
Sound pressure level	Heating	Nom.		dBA	44	47	49
	Cooling	Nom.		dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V		V3/1N~/50/230	
Current	Recommended fuses			A		25	

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split integrated floor standing unit without backup heater

Floor standing air to water heat pump for **heating and hot water**; ideal for low energy houses

- A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Small installation footprint of 595 x 600 mm
- Outdoor unit extracts heat from the outdoor air, even at -25°C

011-1W0218 → 220
011-1W0245, 247
011-1W0249, 251

A+++ A+ 65°C R-32

(3)

Efficiency data					EHVH + ERGA	04S23DV(G) + 04DV	08S23DV(G) + 06DV	08S23DV(G) + 08DV
Heating capacity	Nom.				kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)	7.50 (1) / 7.80 (2)
Power input	Heating	Nom.			kW	0.850 (1) / 1.26 (2)	1,24 (1) / 1,69 (2)	1,63 (1) / 2.23 (2)
COP						5.10 (1) / 3.65 (2)	4,85 (1) / 3,50 (2)	4,60 (1) / 3.50 (2)
Space heating	Average climate water outlet 55°C	General	SCOP			3.26		3.32
			ηs (Seasonal space heating efficiency)		%	127		130
			Seasonal space heating eff. class			A++		
	Average climate water outlet 35°C	General	SCOP			4.48	4.47	4.56
			ηs (Seasonal space heating efficiency)		%	176		179
			Seasonal space heating eff. class			A+++(3)		
Domestic hot water heating	General	Declared load profile				XL		
	Average climate	ηwh (water heating efficiency)			%	134		
		Water heating energy efficiency class				A+		

Indoor Unit					EHVH	04S23DV(G)	08S23DV(G)	08S23DV(G)
Casing	Colour					White + Black		
	Material					Resin / Sheet metal		
Dimensions	Unit	HeightxWidthxDepth			mm	1,850x595x625		
Weight	Unit				kg	139		
Tank	Water volume				l	230		
	Maximum water temperature				°C	70		
	Maximum water pressure				bar	10		
	Corrosion protection					Pickling		
Operation range	Heating	Ambient	Min.~Max.		°C	5~30		
		Water side	Min.~Max.		°C	10 ~70		
	Domestic hot water	Ambient	Min.~Max.		°CDB	5~35		
		Water side	Max.		°C	70		
Sound power level	Nom.				dBA	42		
Sound pressure level	Nom.				dBA	28		

Outdoor Unit					ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth			mm	740x884x388		
Weight	Unit				kg	58.5		
Compressor	Quantity					1		
	Type					Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.		°CDB	10~43		
	Domestic hot water		Min.~Max.		°CDB	-25~35		
Refrigerant	Type					R-32		
	GWP					675.0		
	Charge				kg	1.50		
	Control					Expansion valve		
Sound power level	Heating		Nom.		dBA	58	60	62
	Cooling		Nom.		dBA	61	62	
Sound pressure level	Heating		Nom.		dBA	44	47	49
	Cooling		Nom.		dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage				Hz/V	V3/1N~/50/230		
Current	Recommended fuses				A	25		

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

Type		Material name		Daikin Altherma 3 LT split Wall mounted	Daikin Altherma 3 LT split Floor standing
Controls	Remote user interface	EKRUDAS		●	●
	LAN Adapter + PV Solar connection	BRP069A61		●	●
	LAN only	BRP069A62		●	●
	Room thermostat (wired)	EKRTWA		●	●
	Room thermostat (wireless)	EKRTR1		●	●
	External sensor	EKRTETS		●	●
Adapter	Demand PCB	EKRP1AHTA		●	●
	Digital I/O PCB	EKRP1HBAA		●	●
Back-up heater	Back-up heater kit	EKLBUHCB6W1			• only for EHVH-DV(G)
Installation	Bi-zone kit (watts kit)	BZKA7V3		●	• (excluding EHVZ)
Sensors	Remote indoor sensor	KRCS01-1		●	●
	Remote outdoor sensor	EKRSCA-1		●	●
Others	PC USB Cable	EKPCCAB3		●	●
	Conversion kit	EKHBCONV		●	
		EKHVCONV			●
	Low sound cover for ERGA-D	EKLN-A		●	●

Daikin Altherma 3 ECH_2O

The Daikin Altherma low temperature split integrated ECH_2O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling

Intelligent storage management

› The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
› Continuous heating during defrost mode and use of stored heat for space heating (500l tank only)
› Electronic management of both heat pump and ECH_2O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
› Achieves the highest standards for water sanitation
› Uses more renewable energy with solar connection

Innovative and high-quality tank

› Lightweight plastic tank
› No corrosion, anode, scale or lime deposits
› Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

Combinable with other heat sources

› The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

ECH_2O

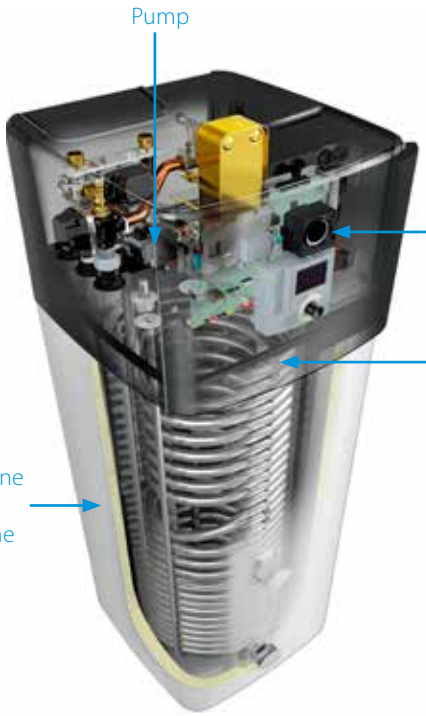

Advanced user interface

The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system.
Blue is perfect! Should the eye turn red, an error has occurred.

Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

Easy operation

The user interface works really fast thanks to its icon-based menus.

Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

ECH$_2$O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.
› Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
› Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
› Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
› Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

Pressureless (drain-back) solar system (EHSH-D, EHSX-D)
› The solar collectors are only filled with water when sufficient heating is provided by the sun
› The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
› After filling, water circulation is maintained by the remaining pump

Pressurised solar system (EHSHB-D, EHSXB-D)
› System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
› System is pressurised and sealed

Monthly energy consumption of an average detached house

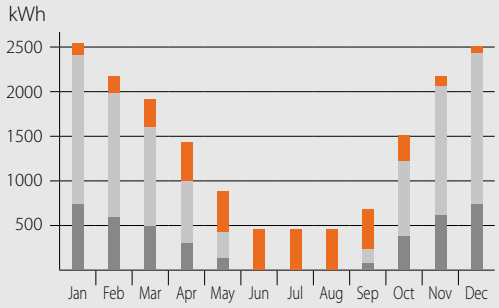

Utilisation of solar energy for domestic hot water and central heating
Heat pump (environmental heat)
Auxiliary energy (electricity)

System diagram: Integrated solar unit

1 Use of solar energy for domestic hot water and central heating
2 External heaxt pump unit
3 Solar thermal collectors
4 Solar pump station

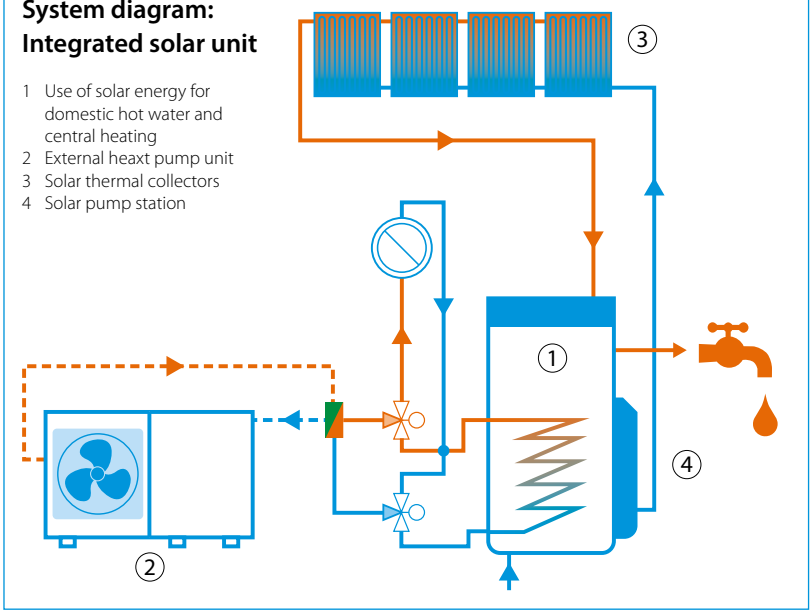

Daikin Altherma 3 ECH$_2$O

Floor standing air to water heat pump for heating and hot water with thermal solar support

- Integrated solar unit, offering top comfort in heating and hot water
- Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- Solar support of domestic hot water with pressureless (drain-back) solar system
- Heat loss is reduced to a minimum thanks to the high quality insulation
- App control possible for managing heating, hot water and cooling operation
- Outdoor unit extracts heat from the outdoor air, even at -25°C
- Possible to connect to photovoltaïc solar panels to provide energy for your heat pump

A+++ (3) A 65°C R-32

Efficiency data				EHSH + ERGA	04P30D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26			3.32	
			ηs (Seasonal space heating efficiency)	%	127			130	
			Seasonal space heating eff. class		A++				
	Average climate water outlet 35°C	General	SCOP		4.48	4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176			179	
			Seasonal space heating eff. class		A+++ (3)				
Domestic hot water heating	General	Declared load profile			L		XL	L	XL
	Average climate	ηwh (water heating efficiency)		%	108		106	108	106
		Water heating energy efficiency class			A				

Indoor Unit				EHSH	04P30D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)				
	Material				Impact resistant polypropylene				
Dimensions	Unit	HeightxWidthxDepth		mm	1891x595x615		1896x790x790	1891x595x615	1896x790x790
Weight	Unit			kg	73		93	73	93
Tank	Water volume			l	294		477	294	477
	Maximum water temperature			°C	85				
Operation range	Heating	Ambient	Min.~Max.	°C	-25~25				
		Water side	Min.~Max.	°C	18~65				
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35				
		Water side	Min.~Max.	°C	25~55				
Sound power level	Nom.			dBA	39.1				
Sound pressure level	Nom.			dBA	28				

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling	Min.~Max.		°CDB	10.0~43.0		
	Domestic hot water	Min.~Max.		°CDB	-25 ~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating	Nom.		dBA	58	60	62
	Cooling	Nom.		dBA	61	62	
Sound pressure level	Heating	Nom.		dBA	44	47	49
	Cooling	Nom.		dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 ECH$_2$O

Floor standing air to water heat pump for bivalent heating and hot water with thermal solar support

- Integrated solar unit, offering top comfort in heating and hot water
- Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- Bivalent system: combinable with a secondary heat source
- Heat loss is reduced to a minimum thanks to the high quality insulation
- App control possible for managing heating and hot water operation

ERGA-DV EHSHB-D

A+++ (3) A 65°C R-32

Efficiency data				EHSHB + ERGA	04P30D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26			3.32	
			ηs (Seasonal space heating efficiency)	%	127			130	
			Seasonal space heating eff. class		A++				
	Average climate water outlet35°C	General	SCOP		4.48	4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176			179	
			Seasonal space heating eff. class		A+++ (3)				
Domestic hot water heating	General	Declared load profile			L		XL	L	XL
	Average climate	ηwh (water heating efficiency)		%	108		109	108	109
		Water heating energy efficiency class			A				

Indoor Unit				EHSHB	04P30D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)				
	Material				Impact resistant polypropylene				
Dimensions	Unit	HeightxWidthxDepth		mm	1891x595x615		1896x790x790	1891x595x615	1896x790x790
Weight	Unit			kg	73		93	73	93
Tank	Water volume			l	294		477	294	477
	Maximum water temperature			°C	85				
Operation range	Heating	Ambient	Min.~Max.	°C	-25~25				
		Water side	Min.~Max.	°C	18~65				
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35				
		Water side	Min.~Max.	°C	25~55				
Sound power level	Nom.			dBA	39.1				
Sound pressure level	Nom.			dBA	28				

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.	°CDB	10.0~43.0		
	Domestic hot water		Min.~Max.	°CDB	-25 ~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating		Nom.	dBA	58	60	62
	Cooling		Nom.	dBA	61	62	
Sound pressure level	Heating		Nom.	dBA	44	47	49
	Cooling		Nom.	dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 ECH$_2$O

Floor standing air to water heat pump for heating, cooling and hot water with thermal solar support

- Integrated solar unit, offering top comfort in heating, hot water and cooling
- Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- Solar support of domestic hot water with pressureless (drain-back) solar system
- Heat loss is reduced to a minimum thanks to the high quality insulation
- App control possible for managing heating, hot water and cooling operation
- Outdoor unit extracts heat from the outdoor air, even at -25°C
- Possible to connect to photovoltaïc solar panels to provide energy for your heat pump

ERGA-DV EHSX-D

A+++ (3) A 65°C R-32

Efficiency data				EHSX + ERGA	04P30D + 04DV	04P50D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)		5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0.94 (1) / 1.14 (2)		1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)		5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26				3.32	
			ηs (Seasonal space heating efficiency)	%	127				130	
			Seasonal space heating eff. class		A++					
	Average climate water outlet 35°C	General	SCOP		4.48		4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176				179	
			Seasonal space heating eff. class		A+++ (3)					
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	ηwh (water heating efficiency)		%	108	106	108	106	108	106
		Water heating energy efficiency class			A					

Indoor Unit				EHSX	04P30D	04P50D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)					
	Material				Impact resistant polypropylene					
Dimensions	Unit	HeightxWidthxDepth		mm	1891x595x615	1896x790x790	1891x595x615	1896x790x790	1891x595x615	1896x790x790
Weight	Unit			kg	73	93	73	93	73	93
Tank	Water volume			l	294	477	294	477	294	477
	Maximum water temperature			°C	85					
Operation range	Heating	Ambient	Min.~Max.	°C	-25~25					
		Water side	Min.~Max.	°C	18~65					
	Cooling	Ambient	Min.~Max.	°CDB	10~43					
		Water side	Min.~Max.	°C	5~22					
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35					
		Water side	Min.~Max.	°C	25~55					
Sound power level	Nom.			dBA	39.1					
Sound pressure level	Nom.			dBA	28					

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.	°CDB	10.0~43.0		
	Domestic hot water		Min.~Max.	°CDB	-25 ~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating		Nom.	dBA	58	60	62
	Cooling		Nom.	dBA	61	62	
Sound pressure level	Heating		Nom.	dBA	44	47	49
	Cooling		Nom.	dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 ECH$_2$O

Floor standing air to water heat pump for bivalent heating, cooling and hot water with thermal solar support

- Integrated solar unit, offering top comfort in heating and hot water
- Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- Bivalent system: combinable with a secondary heat source
- Heat loss is reduced to a minimum thanks to the high quality insulation
- App control possible for managing heating and hot water operation

ERGA-DV EHSXB-D

A+++ (3) A 65°C R-32

Efficiency data				EHSXB + ERGA	04P30D + 04DV	04P50D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)		5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0.94 (1) / 1.14 (2)		1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)		5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26				3.32	
			ηs (Seasonal space heating efficiency)	%	127				130	
			Seasonal space heating eff. class		A++					
	Average climate water outlet 35°C	General	SCOP		4.48		4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176				179	
			Seasonal space heating eff. class		A+++ (3)					
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	ηwh (water heating efficiency)		%	108	109	108	109	108	109
		Water heating energy efficiency class			A					

Indoor Unit				EHSXB	04P30D	04P50D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)					
	Material				Impact resistant polypropylene					
Dimensions	Unit	HeightxWidthxDepth		mm	1891x595x615	1896x790x790	1891x595x615	1896x790x790	1891x595x615	1896x790x790
Weight	Unit			kg	76	99	76	99	76	99
Tank	Water volume			l	294	477	294	477	294	477
	Maximum water temperature			°C	85					
Operation range	Heating	Ambient	Min.~Max.	°C	-25~25					
		Water side	Min.~Max.	°C	18~65					
	Cooling	Ambient	Min.~Max.	°CDB	10~43					
		Water side	Min.~Max.	°C	5~22					
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35					
		Water side	Min.~Max.	°C	25~55					
Sound power level	Nom.			dBA	39.1					
Sound pressure level	Nom.			dBA	28					

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.	°CDB	10.0~43.0		
	Domestic hot water		Min.~Max.	°CDB	-25 ~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating		Nom.	dBA	58	60	62
	Cooling		Nom.	dBA	61	62	
Sound pressure level	Heating		Nom.	dBA	44	47	49
	Cooling		Nom.	dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

Type		Material name	Daikin Altherma 3 ECH$_2$O
Controls	Room thermostat	RoCon U1	
	Mixer module	RoCon M1	
	Outdoor sensor for RoCon controller	RoCon OT1	
	Gateway for apps	RoCon G1	
Back-up heater	Back-up heater 1 kW	BU1C + BUHSWB	
	Back-up heater 3 kW	BU3C + BUHSWB	
	Back-up heater 9 kW	BU9C + BUHSWB	
Hydraulics	Hydraulic separator	HWC	
	Heat insulation for HWC	WHWC	
Pump group	Mixing group with integrated high efficiency pump	MK1	
	Mixing group with integrated high efficiency pump (PWM)	MK2	
	Pump group with mixer module		
	Pump group without mixer module		
Additional connections	Connection kit for MK1	VMK1	
	Dirt separator SAS1	SAS1	
	Dirt separator SAS2	SAS2	
	Biv connector kit		
	DB connector kit		
	Terminal connection kit		
	Connector external heater		
Other	Low sound cover for ERGA-D	EKLN-A	

DESIGN AWARD 2018

reddot award 2018 winner

R-32

BLUEVOLUTION

Daikin Altherma 3 wall mounted unit

Why choose Daikin wall mounted unit?

The Daikin Altherma 3 split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

High flexibility for installation and domestic hot water connection

- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Compact dimensions allows for small installation space, as almost no side clearances are required.
- The unit's sleek design blends in with other household appliances.
- Combine with a stainless steel or ECH$_2$O thermal store

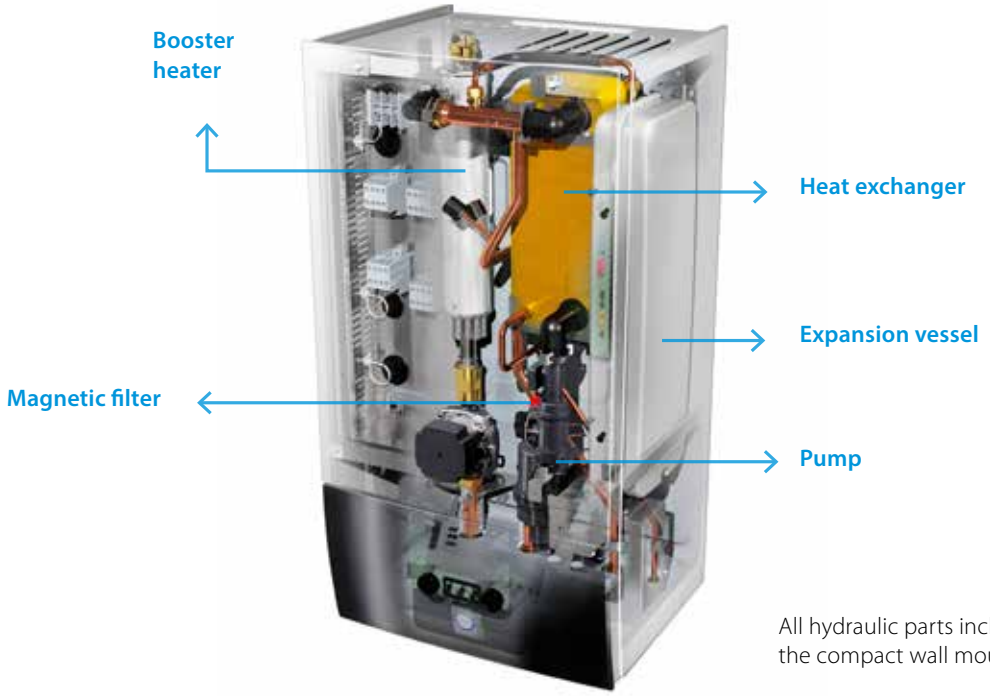

All hydraulic parts included in the compact wall mounted unit

Flexibility in providing domestic hot water

If the end user only requires hot water and installation height is limited, a separate stainless steel tank provides the required installation flexibility.

ECH_2O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- Optimal domestic hot water performance: with high tapping performance
- Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- Lightweight and robust build on the unit combined with cascade principle offers flexible installation options

How does it work?

Build for small and large homes, customers can choose between a pressureless and pressurised hot water system

Example of installation with a stainless steel domestic hot water tank.

Daikin Altherma 3 low temperature split wall mounted unit

Wall mounted **heating only** air-to-water heat pump ideal for low energy houses

- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Compact dimensions allows for small installation space, as almost no side clearances are required.
- The unit's sleek design blends in with other household appliances.
- Combine with a stainless steel tank or ECH$_2$O thermal store.
- Outdoor unit extracts heat from the outdoor air, even at -25°C

011-1W0218-219
011-1W0221
011-1W0246-247

A+++ (3)

65°C

R-32

Efficiency data				EHBH + ERGA	04D6V + 04DV	08D6V + 06DV	08D9W + 06DV	08D6V + 08DV	08D9W + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26			3.32	
			ηs (Seasonal space heating efficiency)	%	127			130	
			Seasonal space heating eff. class		A++				
	Average climate water outlet 35°C	General	SCOP		4.48	4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176			179	
			Seasonal space heating eff. class		A+++ (3)				

Indoor Unit				EHBH	04D6V	08D6V	08D9W	08D6V	08D9W
Casing	Colour				White + Black				
	Material				Resin, sheet metal				
Dimensions	Unit	HeightxWidthxDepth		mm	840x440x390				
Weight	Unit			kg	42.0		42.4	42.0	42.4
Operation range	Heating	Water side	Min.~Max.	°C	15 ~65				
	Domestic hot water	Water side	Min.~Max.	°C	25~80				
Sound power level	Nom.			dBA	42				
Sound pressure level	Nom.			dBA	28				

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.	°CDB	10~43		
	Domestic hot water		Min.~Max.	°CDB	-25~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating		Nom.	dBA	58	60	62
	Cooling		Nom.	dBA	61	62	
Sound pressure level	Heating		Nom.	dBA	44	47	49
	Cooling		Nom.	dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split wall mounted unit

Wall mounted **reversible** air-to-water heat pump ideal for low energy houses

- Inclusion of all hydraulic components means no third party components are required
- PCB board and hydraulic components are located in the front for easy access
- Compact dimensions allows for small installation space, as almost no side clearances are required.
- The unit's sleek design blends in with other household appliances.
- Combine with a stainless steel tank or ECH$_2$O thermal store.
- Outdoor unit extracts heat from the outdoor air, even at -25°C

011-1W0218-219
011-1W0221
011-1W0246-247

A+++ (3)

65°C

R-32

Efficiency data				EHBX + ERGA	04D6V + 04DV	08D6V + 06DV	08D9W + 06DV	08D6V + 08DV	08D9W + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.850 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)	5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0.940 (1) / 1.14 (2)	1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)	5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26			3.32	
			ηs (Seasonal space heating efficiency)	%	127			130	
			Seasonal space heating eff. class		A++				
	Average climate water outlet 35°C	General	SCOP		4.48	4.47		4.56	
			ηs (Seasonal space heating efficiency)	%	176			179	
			Seasonal space heating eff. class		A+++ (3)				

Indoor Unit				EHBX	04D6V	08D6V	08D9W	08D6V	08D9W
Casing	Colour				White + Black				
	Material				Resin, sheet metal				
Dimensions	Unit	HeightxWidthxDepth		mm	840x440x390				
Weight	Unit			kg	42.0		42.4	42.0	42.4
Operation range	Heating	Water side	Min.~Max.	°C	15 ~65				
	Domestic hot water	Water side	Min.~Max.	°C	25~80				
Sound power level	Nom.			dBA	42				
Sound pressure level	Nom.			dBA	28				

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388		
Weight	Unit			kg	58.5		
Compressor	Quantity				1		
	Type				Hermetically sealed swing compressor		
Operation range	Cooling		Min.~Max.	°CDB	10~43		
	Domestic hot water		Min.~Max.	°CDB	-25~35		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg	1.50		
	Control				Expansion valve		
Sound power level	Heating		Nom.	dBA	58	60	62
	Cooling		Nom.	dBA	61	62	
Sound pressure level	Heating		Nom.	dBA	44	47	49
	Cooling		Nom.	dBA	48	49	50
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230		
Current	Recommended fuses			A	25		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

Type		Material name		Daikin Altherma 3 LT split Wall mounted	Daikin Altherma 3 LT split Floor standing
Controls	Remote user interface	EKRUDAS		●	●
	LAN Adapter + PV Solar connection	BRP069A61		●	●
	LAN only	BRP069A62		●	●
	Room thermostat (wired)	EKRTWA		●	●
	Room thermostat (wireless)	EKRTR1		●	●
	External sensor	EKRTETS		●	●
Adapter	Demand PCB	EKRP1AHTA		●	●
	Digital I/O PCB	EKRP1HBAA		●	●
Back-up heater	Back-up heater kit	EKLBUHCB6W1			• only for EHVH-DV(G)
Installation	Bi-zone kit (watts kit)	BZKA7V3		●	• (excluding EHVZ)
Sensors	Remote indoor sensor	KRCS01-1		●	●
	Remote outdoor sensor	EKRSCA-1		●	●
Others	PC USB Cable	EKPCCAB3		●	●
	Conversion kit	EKHBCONV		●	
		EKHVCONV			●
	Low sound cover for ERGA-D	EKLN-A		●	●

Thermal stores and tank

Hot water heating installation options

Why choose a thermal store or domestic hot water tank?

Whether you only need hot water or you want to combine your hot water with solar systems, we offer you the best solutions to the highest levels of comfort, energy efficiency and reliability.

Thermal store

NEW

Stainless steel tank

Domestic hot water tank

Stainless steel tanks

Comfort

› Available in 150, 180, 200, 250 and 300 litres in stainless steel EKHWS(U)-D

Efficiency

› High-quality insulation keeps heat loss to a minimum
› Efficient temperature heating: from 10°C to 50°C in only 60 minutes
› Available as an integrated solution or separate tank

Reliability

› At necessary intervals, the unit can heat up water up to 60°C to prevent the risk of bacteria growth

The ECH$_2$O thermal store range

ECH$_2$O thermal store: additional hot water comfort

Combine your monobloc with a thermal store to achieve the ultimate comfort at home.

› Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
› Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
› Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
› Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

Efficiency

› Fit for the future: maximise renewable energy sources
› Intelligent Heat Storage Management: ensures continuous heating during defrost mode, and uses stored heat for space heating
› High-quality insulation keeps heat loss to a minimum

Reliability

› Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no water loss through the safety valve

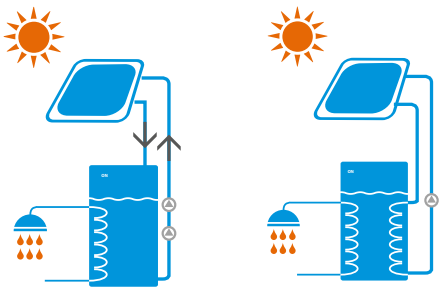

Drain-back solar system

Pressurised solar system

Pressureless (drain-back) solar system

› The solar collectors are only filled with water when sufficient heating is provided by the sun
› The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
› After filling, water circulation is maintained by the remaining pump

Pressurised solar system

› System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
› System is pressurised and sealed

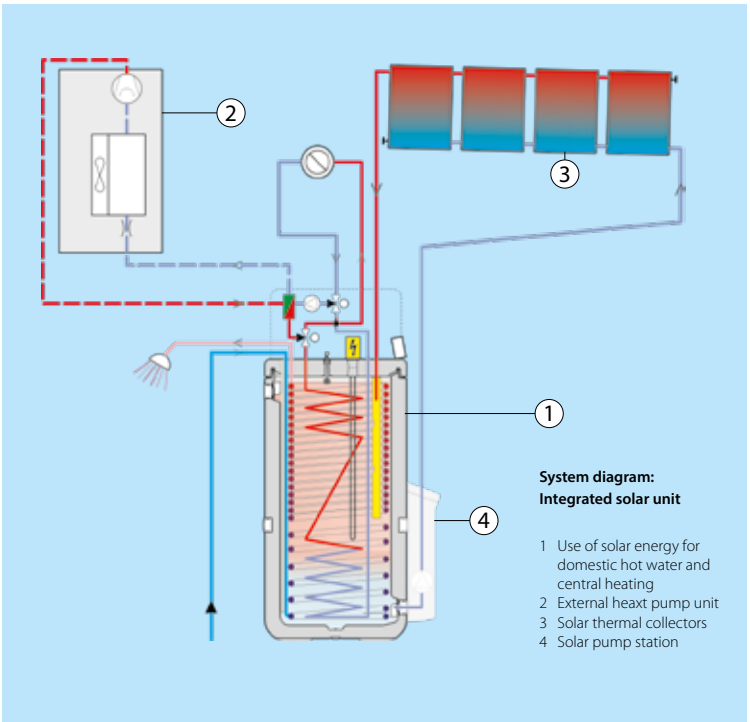

System diagram: Integrated solar unit

1 Use of solar energy for domestic hot water and central heating
2 External heaxt pump unit
3 Solar thermal collectors
4 Solar pump station

Monthly energy consumption of an average detached house

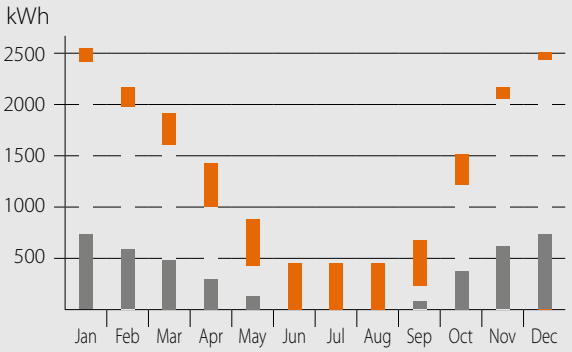

Utilisation of solar energy for domestic hot water and central heating

Heat pump (environmental heat)

Auxiliary energy (electricity)

Thermal store

Plastic domestic hot water tank with solar support

- Tank designed for connection with pressurised thermal solar system
- Tank designed for connection with drainback thermal solar system
- Available in 300 and 500 liters
- Large hot water storage tank to provide domestic hot water at any time
- Heat loss is reduced to a minimum thanks to the high quality insulation
- Space heating support possible (500l tank only)

EKHWP500B

EKHWP300B

Accessory			EKHWP	300B	500B	300PB	500PB
Casing	Colour			Traffic white (RAL9016) / Dark grey (RAL7011)			
	Material			Impact resistant polypropylene			
Dimensions	Unit	Width	mm	595	790	595	790
		Depth	mm	615	790	615	790
Weight	Unit	Empty	kg	58	82	58	89
Tank	Water volume		l	294	477	294	477
	Material			Polypropylen			
	Maximum water temperature		°C	85			
	Insulation	Heat loss	kWh/24h	1.5	1.7	1.5	1.7
	Energy efficiency class			B			
	Standing heat loss		W	64	72	64	72
	Storage volume		l	294	477	294	477
Heat exchanger	Domestic hot water	Quantity		1			
		Tube material		Stainless steel (DIN 1.4404)			
		Face area	m^2	5.600	5.800	5.600	5.900
		Internal coil volume	l	27.1	28.1	27.1	28.1
		Operating pressure	bar	6			
		Average specifc thermal output	W/K	2,790	2,825	2,790	2,825
	Charging	Quantity		1			
		Tube material		Stainless steel (DIN 1.4404)			
		Face area	m^2	3	4	3	4
		Internal coil volume	l	13	18	13	18
		Operating pressure	bar	3			
		Average specifc thermal output	W/K	1,300	1,800	1,300	1,800
	Pressurised solar	Average specifc thermal output	W/K	-		390.00	840.00
	Auxiliary solar heating	Tube material		-	Stainless steel (DIN 1.4404)	-	Stainless steel (DIN 1.4404)
		Face area	m^2	-	1	-	1
		Internal coil volume	l	-	4	-	4
		Operating pressure	bar	-	3	-	3
		Average specifc thermal output	W/K	-	280	-	280

Domestic hot water tank

Stainless steel domestic hot water tank

› Available in 150, 180, 200, 250 and 300 litres in stainless steel EKHWS(U)-D

EKHWS(U)-D

Accessory			EKHWS	150(U)D3V3	180(U)D3V3	200(U)D3V3	250(U)D3V3	300(U)D3V3
Casing	Colour			Neutral white				
	Material			Epoxy coated steel / Epoxy-coated mild steel				
Weight	Unit	Empty	kg	45	50	53	58	63
Tank	Water volume		l	145	174	192	242	292
	Material			Stainless steel (EN 1.4521)				
	Maximum water temperature		°C	75				
	Insulation	Heat loss	kWh/24h	1.1	1.2	1.3	1.4	1.6
	Energy efficiency class			B				
	Standing heat loss		W	45	50	55	60	68
	Storage volume		l	145	174	192	242	292
Heat exchanger	Domestic hot water	Quantity		1				
		Tube material		Stainless steel (EN 1.4521)				
		Face area	m^2	1.050	1.400	1.800		
		Internal coil volume	l	4.9	6.5	8.2		
		Operating pressure	bar	10				
Booster heater	Capacity		kW	3				
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230				

Always in control

Daikin Online Controller

The Daikin Online Controller application can control and monitor the status of your heating system and allows you to:

Monitor
› The status of your heating system
› Your energy consumption graphs*

Schedule
› Schedule the set temperature* and operation mode
with up to **6 actions per day for 7 days**
› Enable **holiday mode**
› View in intuitive mode

Control **
› The **operation mode** and set temperature
› Remotely control your system and domestic hot water

*Starting with ERGA-D

*Control via the app
› Room thermostat control for space heating and domestic hot water
› Leaving water temperature control for domestic hot water
› External control for domestic hot water

Daikin Online Heating Control
The Daikin Online Control Heating app is a multifaceted programme that allows customers to control and monitor the status of their heating system.

Main features
› 'Daikin Eye' (intuitive setting)
› Tank temperature monitoring
› Equipped with GDPR (data protection)
› Remote firmware update of LAN Adapter
› Control over multiple unit locations

Applicable Daikin units
› Daikin Altherma low temperature split
› Daikin Altherma low temperature monobloc (5-7 kW)
› Daikin Altherma ground source heat pump
› Daikin Altherma hybrid heat pump
› Wall mounted gas condensing boiler D2CND
› GCU compact

		Thermostat	APP	BRP069A61 BRP069A62	KRCS01-1	EKRUDAS	EKRTR
Daikin Altherma 3	Room temperature	Yes	Yes	•		•	
		No	Yes	•	•		
	External control	Yes	No				•
	Leaving water temperature	Yes	No			•	

EKRUDAS

Control

› Manage room and domestic hot water temperature
› User-friendly remote control with contemporary design
› Easy to use with direct accessibility to all main functions

Comfort

› An additional user interface can include a room thermostat in the space to be heated
› Easy commissioning via an intuitive interface

Indoor unit			EKRUDAS
Control systems	Class of temperature control		VI
	Contribution to seasonal space heating efficiency	%	4.0

EKRTR/EKRTW

Control

The LCD screen of the room thermostat presents the necessary information regarding the setting of the Daikin Altherma system.

Comfort

An external sensor (EKRTETS) can be placed between the underfloor heating and the floor, as an alternative to the wireless room thermostat.

General features

› Set the temperature of the room based on measurements from the built-in or external sensor
› Off function (with integrated frost-protection function)
› Holiday function mode
› Comfort and reduced function modes
› Time (day and month)
› Programmable weekly timer with 2 user defined and 5 preset programmes, with up to 12 actions per day
› Keylock function
› Set limits: the installer can change the upper and lower limits
› Floor temperature protection

Applicable Daikin units

› Combinable to all Daikin units

				EKRTR	EKRTWA
Dimensions	Unit	HeightxWidthxDepth	mm	-x-x-	87x125x34
	Thermostat	Height/Width/Depth	mm	87/125/34	-/-/-
	Receiver	Height/Width/Depth	mm	170/50/28	-/-/-
Weight	Unit		g	-	215
	Thermostat		g	210	-
	Receiver		g	125	-
Ambient temperature	Storage	Min./Max.	°C	-20/60	
	Operation	Min./Max.	°C	0/50	
Temperature setting range	Heating	Min./Max.	°C	4/37	
	Cooling	Min./Max.	°C	4/37	
Clock				Yes	
Regulation function				Proportional band	
Power supply	Voltage		V	-	Battery powered 3* AA-LR6 (alkaline)
	Thermostat	Voltage	V	Battery powered 3x AA-LRG (alkaline)	-
	Receiver	Voltage	V	230	-
	Frequency		Hz	50	-
	Phase			1~	-
Connection	Type			-	Wired
	Thermostat			Wireless	-
	Receiver			Wired	-
Maximum distance to receiver	Indoor		m	approx. 30m	-
	Outdoor		m	approx. 100m	-
Control systems	Class of temperature control			IV	
	Contribution to seasonal space heating efficiency		%	2.0	

Discover
a world of silence

The low sound cover is the ideal and practical way to lower the sound of the Daikin Altherma outdoor unit. It allows for the unit to be ine line with local regulations on sound emission or in the case of limited space, when the unit is installted close to a neighbouring property. With the use of this new Low Sound Cover, the sound performances of the Daikin Altherma outdoor units can be reduced with an additional -3 dB(A).

Sound reduction

- Reducing the emitted sound with -3 dB(A) which corresponds to more than 50% reduction of the sound level
- To use with Daikin Altherma ERGA-D or ERLQ-C outdoor units
- In night mode, the sound is reduced to less than 35 dB(A) at 3 metres.

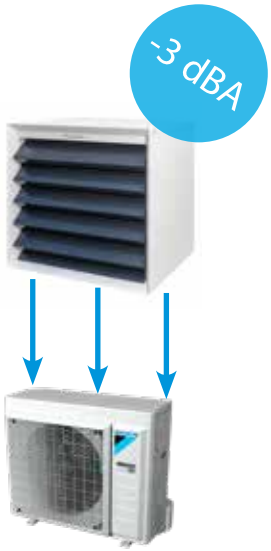

Functional and modern outlook

The smooth and discrete design blends in with today's house architecture.

Safeguarded performance & warranty

- The installation of the low sound cover has no impact on the heating performances of your outdoor unit, only the noise is reduced.
- Your warranty remains unchanged.

Quick installation

- The low sound cover is delivered in a flat pack
- It can be installed over a floor or a wall mounted outdoor unit
- The cover can easily be assembled, based on a set of simple and straightforward instructions, delivered with the pack
- The installation of the low sound cover takes less than 20 minutes

			Wall mounted		Floor standing	integrated tank
						EHVH08S23DAV(G)
						EHVH08S18DA6V(G)
					EHVH04S23DAV(G)	EHVH08S23DA6V(G)
					EHVH04S18DA6V(G)	EHVH08S18DA9W(G)
					EHVH04S23DA6V(G)	EHVH08S23DA9W(G)
				EHBH08DA6V	EHVX04S18DA3V(G)	EHVX08S18DA6V(G)
				EHBH08DA9W	EHVX04S18DA6V(G)	EHVX08S23DA6V(G)
			EHBH04DA6V	EHBX08DA6V	EHVX04S23DA3V(G)	EHVX08S18DA9W(G)
Type	**Description**	**Material name**	**EHBX04DA6V**	**EHBX08DA9W**	**EHVX04S23DA6V(G)**	**EHVX08S23DA9W(G)**
Outdoor unit		ERGA04DAV3	●		●	
		ERGA06DAV3		●		●
		ERGA08DAV3		●		●
Options	Digital PCB	EKRP1HBAA	●	●	●	●
	Demand PCB	EKRP1AHTA	●	●	●	●
	User interface	EKRUDAS	●	●	●	●
	LAN Adapter	BRP069A61	●	●	●	●
		BRP069A62	●	●	●	●
	Remote indoor sensor	KRCS01-1	●	●	●	●
	Remote outdoor sensor	EKRSCA1	●	●	●	●
	PC USB Cable	EKPCCAB3	●	●	●	●
	Back-up heater kit	EKLBUHCB6W1			● only for EHVH-DV(G)	● only for EHVH-DV(G)
Heat pump convector		FWXV15AVEB	●	●	●	●
		FWXV20AVEB	●	●	●	●
Thermal stores	Polypropylene (with drainback solar)	EKHWP300B	●	●		
		EKHWP500B	●	●		
	Polypropylene (with pressurised solar)	EKHWP300PB	●	●		
		EKHWP500PB	●	●		
Bi-zone kit	Watts kit	BZKA7V3	●	●	●	●
Room thermostat	Wired	EKRTWA	●	●	●	●
	Wireless	EKRTR1	●	●	●	●
	External sensor	EKRTETS	●	●	●	●
Stainless steel tank		EKHWS(U)-D	●	●		
		EKSRPS4A				
Options	Room thermostat					
	Mixer module					
	Outdoor sensor for RoCon controller					
	Gateway for apps					
	Back-up heater 1 kW / 3kW / 9kW					
	Hydraulic separator					
	Heat insulation for HWC					
	Mixing group with integrated high efficiency pump					
	Mixing group with integrated high efficiency pump (PWM)					
	Pump group with mixer module					
	Pump group without mixer module					
	Connection kit for MK1					
	Dirt separator SAS1					
	Dirt separator SAS2					
	Biv connector kit					
	DB connector kit					
	Terminal connection kit					
	Connector external heater					

Floor standing integrated bi-zone		Floor standing integrated ECH2O	Solar kit	Outdoor drain pan kit	Moutning feet	Heater tape for drain pan	Valve kit	Low sound cover
	EHVZ08S18DA6V(G)	EHSH-D						
	EHVZ08S23DA6V(G)	EHSHB-D						
	EHVZ08S18DA9W(G)	EHSB-D						
EHVZ04S18DA6V(G)	EHVZ08S23DA9W(G)	EHSBX-D	EKSRPS4A	EKDP008D	EKFT008D	EKDPH008CA	EKVKHPC	
●		●		●	●	●		●
	●	●		●	●	●		●
	●	●		●	●	●		●
●	●							
●	●							
●	●							
●	●							
●	●							
●	●							
●	●							
●	●							
		●						
●	●						●	
●	●						●	
			●					
			●					
			●					
			●					
●	●							
●	●							
●	●							
		●						
		●						
		●

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)

ECPEN18-786A 07/18

MIX
Paper from responsible sources
FSC® C109049

CERTIFIED ISO 9001 · ISO 14001

EUROVENT CERTIFIED PERFORMANCE
www.eurovent-certification.com

Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.