



# User reference guide

## Daikin room air conditioner



*Siesta*<sup>®</sup>

ATXP20L2V1B  
ATXP25L2V1B  
ATXP35L2V1B

User reference guide  
Daikin room air conditioner

English

## Table of contents










<b>1</b>	<b>General safety precautions</b>	<b>2</b>
1.1	About the documentation .....	2
1.1.1	Meaning of warnings and symbols.....	2
1.2	For the user .....	2
<b>2</b>	<b>About the documentation</b>	<b>3</b>
2.1	About this document.....	3
2.2	User reference guide at a glance .....	3
<b>3</b>	<b>About the system</b>	<b>3</b>
3.1	Indoor unit .....	3
3.2	About the user interface .....	4
3.2.1	Components: User interface .....	4
3.2.2	Status: User interface LCD .....	4
3.2.3	To operate the user interface.....	5
<b>4</b>	<b>Before operation</b>	<b>5</b>
4.1	Overview: Before operation.....	5
4.2	To fix the user interface to the wall.....	5
4.3	To insert the batteries.....	5
4.4	To switch between Fahrenheit and Celsius.....	5
4.5	To turn on the power supply.....	5
<b>5</b>	<b>Operation</b>	<b>5</b>
5.1	Operation range .....	5
5.2	When to use which feature .....	6
5.3	Operation mode and temperature setpoint.....	6
5.3.1	To start/stop operation and to set the temperature.....	6
5.3.2	Airflow rate.....	6
5.3.3	Airflow direction.....	7
5.3.4	Comfort airflow operation.....	7
5.3.5	Powerful operation.....	7
5.3.6	Econo operation.....	8
5.3.7	ON/OFF timer operation .....	8
<b>6</b>	<b>Energy saving and optimum operation</b>	<b>9</b>
<b>7</b>	<b>Maintenance and service</b>	<b>9</b>
7.1	Overview: Maintenance and service .....	9
7.2	To clean the indoor unit and user interface .....	10
7.3	To clean the front panel.....	10
7.4	About the air filter .....	10
7.5	To clean the air filters .....	10
7.6	To clean the titanium apatite deodorizing filter.....	11
7.7	To replace the titanium apatite deodorizing filter.....	11
7.8	To take following items into account before a long idle period..	11
<b>8</b>	<b>Troubleshooting</b>	<b>11</b>
8.1	Symptoms that are NOT system malfunctions.....	12
8.1.1	Symptom: A sound like water flowing is heard .....	12
8.1.2	Symptom: A blowing sound is heard.....	12
8.1.3	Symptom: A ticking sound is heard.....	12
8.1.4	Symptom: A whistling sound is heard .....	12
8.1.5	Symptom: A clicking sound during operation or idle time is heard .....	12
8.1.6	Symptom: A clapping sound is heard .....	12
8.1.7	Symptom: The units can give off odours.....	12
8.1.8	Symptom: The outdoor fan rotates while the air conditioner is not in operation .....	12
8.2	Solving problems based on error codes.....	12
<b>9</b>	<b>Disposal</b>	<b>13</b>
<b>10</b>	<b>Glossary</b>	<b>13</b>




# 1 General safety precautions

## 1.1 About the documentation

- The original documentation is written in English. All other languages are translations.
- The precautions described in this document cover very important topics, follow them carefully.
- The installation of the system, and all activities described in the installation manual and the installer reference guide **MUST** be performed by an authorised installer.

### 1.1.1 Meaning of warnings and symbols

	<b>DANGER</b> Indicates a situation that results in death or serious injury.
	<b>DANGER: RISK OF ELECTROCUTION</b> Indicates a situation that could result in electrocution.
	<b>DANGER: RISK OF BURNING</b> Indicates a situation that could result in burning because of extreme hot or cold temperatures.
	<b>DANGER: RISK OF EXPLOSION</b> Indicates a situation that could result in explosion.
	<b>WARNING</b> Indicates a situation that could result in death or serious injury.
	<b>WARNING: FLAMMABLE MATERIAL</b>
	<b>CAUTION</b> Indicates a situation that could result in minor or moderate injury.
	<b>NOTICE</b> Indicates a situation that could result in equipment or property damage.
	<b>INFORMATION</b> Indicates useful tips or additional information.

Symbol	Explanation
	Before installation, read the installation and operation manual, and the wiring instruction sheet.
	Before performing maintenance and service tasks, read the service manual.
	For more information, see the installer and user reference guide.

## 1.2 For the user

- If you are NOT sure how to operate the unit, contact your installer.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall NOT play with the appliance. Cleaning and user maintenance shall NOT be made by children without supervision.



### WARNING

To prevent electric shocks or fire:

- Do NOT rinse the unit.
- Do NOT operate the unit with wet hands.
- Do NOT place any objects containing water on the unit.



### NOTICE

- Do NOT place any objects or equipment on top of the unit.
- Do NOT sit, climb or stand on the unit.

- Units are marked with the following symbol:



This means that electrical and electronic products may NOT be mixed with unsorted household waste. Do NOT try to dismantle the system yourself: the dismantling of the system, treatment of the refrigerant, of oil and of other parts must be done by an authorized installer and must comply with applicable legislation. Units must be treated at a specialized treatment facility for reuse, recycling and recovery. By ensuring this product is disposed of correctly, you will help to prevent potential negative consequences for the environment and human health. For more information, contact your installer or local authority.

- Batteries are marked with the following symbol:



This means that the batteries may NOT be mixed with unsorted household waste. If a chemical symbol is printed beneath the symbol, this chemical symbol means that the battery contains a heavy metal above a certain concentration.

Possible chemical symbols are: Pb: lead (>0.004%).

Waste batteries must be treated at a specialized treatment facility for reuse. By ensuring waste batteries are disposed of correctly, you will help to prevent potential negative consequences for the environment and human health.

## 2 About the documentation

### 2.1 About this document

Thank you for purchasing this product. Please:

- Keep the documentation for future reference.

#### Target audience

End users



### INFORMATION

This appliance is intended to be used by expert or trained users in shops, in light industry, and on farms, or for commercial and household use by lay persons.

#### Documentation set

This document is part of a documentation set. The complete set consists of:

- General safety precautions:**
  - Safety instructions that you must read before operating your system
  - Format: Paper (in the box of the indoor unit)

- Operation manual:**

- Quick guide for basic usage
- Format: Paper (in the box of the indoor unit)

- User reference guide:**

- Detailed step-by-step instructions and background information for basic and advanced usage
- Format: Digital files on <http://www.daikineurope.com/support-and-manuals/product-information/>

Latest revisions of the supplied documentation may be available on the regional Daikin website or via your installer.

The original documentation is written in English. All other languages are translations.

### 2.2 User reference guide at a glance

Chapter	Description
General safety precautions	Safety instructions that you MUST read before operation
About the documentation	What documentation exists for the user
About the system	<ul style="list-style-type: none"> <li>Operation range</li> <li>Description of indoor unit and user interface</li> </ul>
Before operation	What to do before starting operation
Operation	How and when to use certain features
Energy saving and optimum operation	How to save energy
Maintenance and service	How to maintain and service the unit
Troubleshooting	What to do in case of problems
Disposal	How to dispose of the system
Glossary	Definition of terms

## 3 About the system



### WARNING: FLAMMABLE MATERIAL

The refrigerant inside this unit is mildly flammable.

### 3.1 Indoor unit



### CAUTION

Do NOT insert fingers, rods or other objects into the air inlet or outlet. When the fan is rotating at high speed, it will cause injury.



### INFORMATION


The sound pressure level is less than 70 dBA.



### WARNING

- Do not modify, disassemble, remove, reinstall or repair the unit yourself as incorrect dismantling or installation may cause an electric shock or fire. Contact your dealer.
- In case of accidental refrigerant leaks, make sure there are no naked flames. The refrigerant itself is entirely safe, non-toxic and mildly flammable, but it will generate toxic gas when it accidentally leaks into a room where combustible air from fan heaters, gas cookers, etc. is present. Always have qualified service personnel confirm that the point of leakage has been repaired or corrected before resuming operation.

### 3 About the system

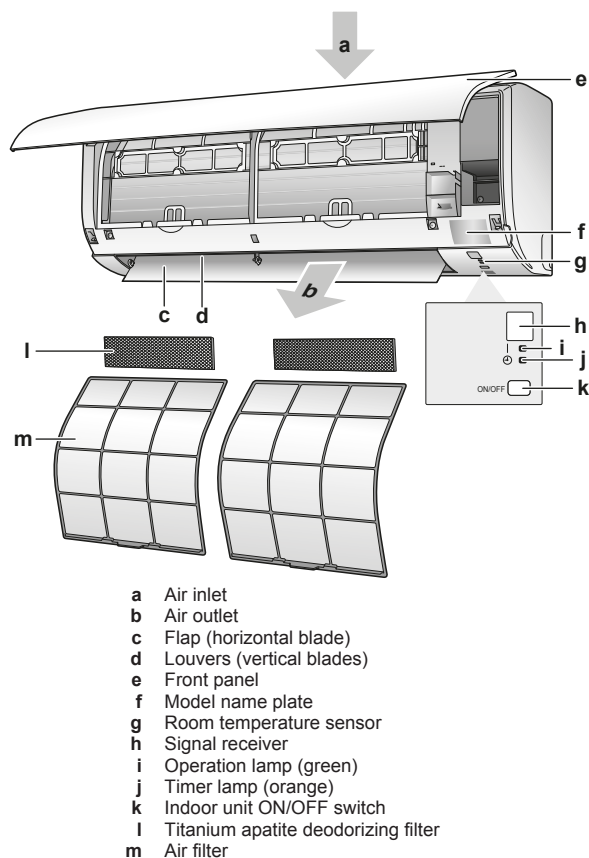

#### ON/OFF button

If the user interface is missing, you can use the ON/OFF button on the indoor unit to start/stop operation. When operation is started using this button, the following settings are used:

- Operation mode = Automatic
- Temperature setting = 25°C
- Airflow rate = Automatic

### 3.2 About the user interface


- **Direct sunlight.** Do NOT expose the user interface to direct sunlight.
- **Dust.** Dust on the signal transmitter or receiver will reduce sensitivity. Wipe off dust with a soft cloth.
- **Fluorescent lights.** Signal communication might be disabled if fluorescent lamps are in the room. In that case, contact your installer.
- **Other appliances.** If the user interface signals operate other appliances, move the other appliances, or contact your installer.
- **Curtains.** Make sure that the signal between the unit and the user interface is NOT blocked by curtains or other objects.



#### NOTICE


- Do NOT drop the user interface.
- Do NOT let the user interface get wet.

#### 3.2.1 Components: User interface

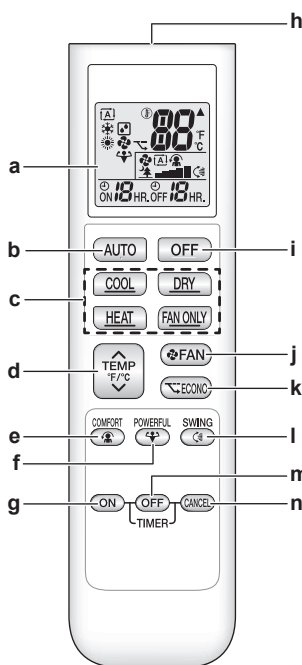

- a Display (LCD)
- b Auto button
- c Direct operation button
- d Temperature adjustment button
- e Comfort button
- f Powerful button
- g ON timer button
- h Signal transmitter
- i OFF button
- j Fan setting button
- k Econo button
- l Swing button
- m OFF timer button (Night set mode)
- n Timer cancel button


#### 3.2.2 Status: User interface LCD



Icon	Description
	Operation mode = Automatic
	Operation mode = Drying
	Operation mode = Heating
	Operation mode = Cooling
	Operation mode = Fan only
	Powerful operation is active
	Econo operation is active
	The indoor unit receives a signal from the user interface
	Current temperature setting
	Airflow rate = Automatic

Icon	Description
	Airflow rate = Indoor unit quiet
	Airflow rate = High
	Airflow rate = Medium high
	Airflow rate = Medium
	Airflow rate = Medium low
	Airflow rate = Low
	Comfort operation is active
	Auto vertical swing is active
	ON timer is active
	OFF timer is active

### 3.2.3 To operate the user interface



- 1 Aim the signal transmitter at the signal receiver on the indoor unit (maximum distance for communication is 7 m).

**Result:** When the indoor unit receives a signal from the user interface, you will hear a sound:

Sound	Description
Beep-beep	Operation starts.
Beep	Setting changes.
Long beep	Operation stops.

## 4 Before operation

### 4.1 Overview: Before operation


This chapter describes what you have to do before operating the unit.

#### Typical workflow

Before operation usually consist of the following stages:

- Fixing the user interface to the wall.
- Inserting the batteries in the user interface.
- Changing Fahrenheit or Celsius unit setting.
- Turning on the power supply.

### 4.2 To fix the user interface to the wall

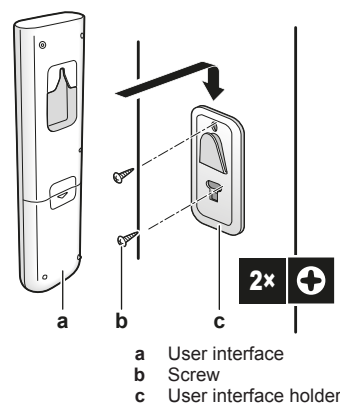


- 1 Choose a place where the signals reach the unit.
- 2 Attach the holder with screws to the wall or a similar location.
- 3 Hang the user interface on the user interface holder.

### 4.3 To insert the batteries

The batteries will last for about 1 year.

- 1 Remove the back cover.
- 2 Insert both batteries at once.
- 3 Replace the back cover.

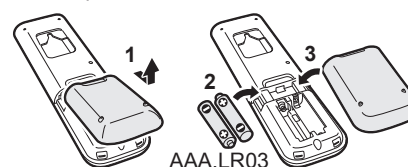

### 4.4 To switch between Fahrenheit and Celsius

Change this setting only when the temperature is displayed.

- 1 Press **TEMP** and **ON** simultaneously for about 5 seconds.

**Result:** The setting changes.

### 4.5 To turn on the power supply

- 1 Turn the circuit breaker on.

**Result:** The flap of the indoor unit will open and close to set the reference position.

## 5 Operation

### 5.1 Operation range

Use the system in the following temperature and humidity ranges for safe and effective operation.

Operation mode	Operation range
Cooling <sup>(a)(b)</sup>	<ul style="list-style-type: none"> <li>▪ Outdoor temperature: -10~46°C</li> <li>▪ Indoor temperature: 18~32°C</li> <li>▪ Indoor humidity: ≤80%</li> </ul>
Heating <sup>(a)</sup>	<ul style="list-style-type: none"> <li>▪ Outdoor temperature: -15~24°C</li> <li>▪ Indoor temperature: 10~30°C</li> </ul>

## 5 Operation

Operation mode	Operation range
Drying <sup>(a)</sup>	<ul style="list-style-type: none"> <li>Outdoor temperature: -10~46°C</li> <li>Indoor temperature: 18~32°C</li> <li>Indoor humidity: ≤80%</li> </ul>

- If operated outside the operation range:
- (a) A safety device might stop the operation of the system.
- (b) Condensation might occur on the indoor unit and drip.

### 5.2 When to use which feature

You can use the following table to determine which features to use:

Feature	Tasks
<b>Basic features</b>	
Operation modes and temperature	<p>To start/stop the system and to set the temperature:</p> <ul style="list-style-type: none"> <li>Heat up or cool down a room.</li> <li>Blow air in a room without heating or cooling.</li> <li>Decrease the humidity in a room.</li> <li>In Automatic mode, automatically select an appropriate temperature and operation mode.</li> </ul>
Airflow direction	To adjust the airflow direction (swing or fixed position).
Airflow rate	<p>To adjust the amount of air blown into the room.</p> <p>To run more quietly.</p>
<b>Advanced features</b>	
Econo	<p>To use the system when you are also using other power-consuming appliances.</p> <p>To save energy.</p>
Comfort	To provide a comfortable airflow that does NOT come in direct contact with people.
Powerful	To cool down or heat up the room quickly.
ON timer +  OFF timer	To automatically turn ON or OFF the system.

### 5.3 Operation mode and temperature setpoint

**When.** Adjust the system operation mode, and set the temperature when you want to:

- Heat up or cool down a room
- Blow air in a room without heating or cooling
- Decrease the humidity in a room

**What.** The system operates differently depending on the user selection.

Setting	Description
Automatic	The system cools down or heats up a room to the temperature setpoint. It automatically switches between cooling and heating if necessary.
Drying	The system decreases the humidity in a room without changing the temperature.
Heating	The system heats up a room to the temperature setpoint.

Setting	Description
Cooling	The system cools down a room to the temperature setpoint.
Fan	<p>The system only controls the airflow (airflow rate and airflow direction).</p> <p>The system does NOT control the temperature.</p>

**Additional info:**

- Outside temperature.** The system's cooling or heating effect decreases when the outside temperature is too high or too low.
- Defrost operation.** During heating operation, frost might occur on the outdoor unit and decrease the heating capacity. In that case, the system automatically switches to defrosting operation to remove the frost. During defrosting operation, hot air is NOT blown from the indoor unit.

#### 5.3.1 To start/stop operation and to set the temperature

: Operation mode = Automatic

: Operation mode = Drying

: Operation mode = Heating

: Operation mode = Cooling

: Operation mode = Fan only

: Shows the set temperature.

- Start** operation by pressing one of the following buttons.

**Result:** The operation lamp lights up.

Mode	Press	Result
Automatic operation		
Cooling operation		
Drying operation		
Heating operation		
Fan only operation		

- Press or on the button one or more times to set the temperature.

**Note:** When using drying or fan only mode, you CANNOT adjust the temperature or airflow rate.

Cooling operation	Heating operation	Automatic operation	Drying or Fan only operation
18~32°C	10~30°C	18~30°C	—

- Press to stop operation.

**Result:** The operation lamp goes off.

#### 5.3.2 Airflow rate

**Note:** If the unit reach the temperature set point in cooling, heating or automatic mode. Fan will stop operating.

- Press to choose:

	5 airflow rate levels, from "1" to "5"
	Automatic operation



Indoor unit quiet operation. When the airflow is set to "🌳", the noise from the unit will be reduced.

**Note:** When using **Drying** operation or **Fan only** mode, you CANNOT adjust the airflow rate setting.

### To adjust the airflow rate

- 1 Press **FAN** to change the airflow setting in the following sequence.



### 5.3.3 Airflow direction

**When.** Adjust the airflow direction as desired.

**What.** The system directs the airflow differently, depending on the user selection (swinging or fixed position). It does so by moving the vertical blades.


Setting	Airflow direction
Vertical auto swing	Moves up and down.
[—]	Stays in a fixed position.



#### CAUTION

- ALWAYS use a user interface to adjust the angles of the flap. When the flap is swinging and you move it forcibly by hand, the mechanism will break.
- Be careful when adjusting the louvers. Inside the air outlet, a fan is rotating at high speed.

**Note:** The movable range of the flap varies according to the operation mode. The flap will stop at the upper position when the airflow rate is changed to low during the up and down swing setting.



- a Flap range in cooling or drying operation
- b Flap range in heating operation
- c Flap range in fan only operation

### To adjust the airflow direction

- 1 To use auto swing, press .
 


**Result:** will appear on the LCD.

**Result:** The flap (horizontal blade) will begin to swing.
- 2 To use fixed position, press when the flap reaches the desired position.
 

**Result:** disappears from the LCD.

### To adjust the louvers (vertical blades)

- 1 Hold 1 or both knobs and move the louvers.

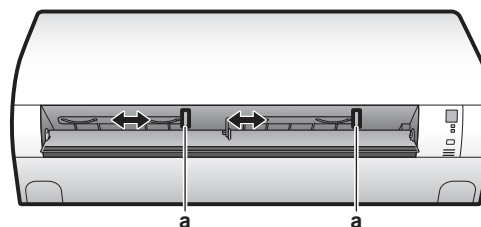

a Knobs



#### INFORMATION

When the unit is installed in a corner of a room, the direction of the louvers should be facing away from the wall. Efficiency will drop if a wall blocks the air.

### 5.3.4 Comfort airflow operation

This operation can be used in **Heating** or **Cooling** operation mode. It will provide a comfortable wind that will NOT come in direct contact with people.

#### To start/stop Comfort airflow operation



#### INFORMATION

Powerful and Comfort airflow operation CANNOT be used at the same time. The last selected function takes priority. If the upper or lower direction is selected, Comfort airflow operation will be cancelled.

- 1 Press to start.

**Result:** The flap position will change, is displayed on the LCD, and the airflow rate is set to automatic.

Mode	Position of flap...
Cooling/Drying	Up
Heating	Down

**Note:** Comfort airflow operation is NOT available in Fan only mode.

- 2 Press to stop.

**Result:** The flap will return to the position from before the Comfort airflow mode; disappears from the LCD.

### 5.3.5 Powerful operation

This operation quickly maximizes the cooling/heating effect in any operation mode. You can get the maximum capacity.

#### To start/stop Powerful operation

- 1 Press to start.

**Result:** is displayed on the LCD. Powerful operation runs for 20 minutes; after that, operation returns to the previously set mode.

Mode	Airflow rate
Cooling/Heating/Automatic	<ul style="list-style-type: none"> <li>▪ To maximize the cooling/heating effect, the capacity of outdoor unit is increased.</li> <li>▪ The airflow rate is fixed to the maximum setting.</li> </ul> <p>The temperature and airflow settings CANNOT be changed.</p>
Drying	<ul style="list-style-type: none"> <li>▪ The temperature setting is lowered by 2.5°C.</li> <li>▪ The airflow rate is slightly increased.</li> </ul>



## 5 Operation

Mode	Airflow rate
Fan only	The airflow rate is fixed to the maximum setting.

- Press  to stop.

**Result:**  disappears from the LCD.



### INFORMATION

Powerful operation CANNOT be used together with Econo and Comfort airflow operation. The last selected function takes priority.

Powerful operation will NOT increase the capacity of the unit if it already operates at maximum capacity.

### 5.3.6 Econo operation

This is a function which enables efficient operation by limiting the maximum power consumption value. This function is useful for cases in which attention should be paid to ensure a circuit breaker will not trip when the product runs alongside other appliances.

#### To start/stop Econo operation


- Press  to start.

**Result:**  is displayed on the LCD.

**Note:** Econo operation is NOT available in Fan only mode.

- Press  to stop.

**Result:**  disappears from the LCD.

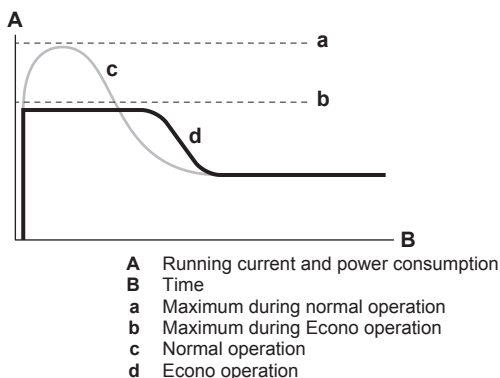

- The diagram can be used for illustrative purposes only.
- The maximum running current and power consumption of the air conditioner in Econo operation varies with the connected outdoor unit.



### INFORMATION


- Powerful and Econo operation CANNOT be used at the same time. The last selected function takes priority.
- Econo operation reduces power consumption of the outdoor unit by limiting the rotation speed of the compressor. If power consumption is already low, Econo operation will NOT further reduce power consumption.

### 5.3.7 ON/OFF timer operation

Timer functions are useful for automatically switching the air conditioner on/off at night or in the morning. You can also use OFF timer and ON timer in combination.


#### To start/stop ON timer operation

- Press  to start.


**Result:**  HR. is displayed on the LCD and the timer lamp lights up.



### INFORMATION

Each time  is pressed, the time setting advances by 1 hour. The timer can be set between 1 to 12 hours.

- Press  to stop.

**Result:**  HR. disappears from the LCD and the timer lamp goes off.




### INFORMATION

Program the timer again in case of:

- A breaker has turned the unit off.
- A power failure.
- After replacing batteries in the user interface.


#### To start/stop OFF timer operation

- Press  to start.


**Result:**  HR. is displayed on the LCD and the timer lamp lights up.



### INFORMATION

Each time  is pressed, the time setting advances by 1 hour. The timer can be set between 1 to 12 hours.

- Press  to stop.

**Result:**  HR. disappears from the LCD and the timer lamp goes off.



### INFORMATION

When you set the ON/OFF timer, the time setting is stored in the memory. The memory will be reset when the user interface batteries are replaced.

#### Use of night set mode in combination with OFF timer

The air conditioner automatically adjusts the temperature setting (0.5°C up in cooling, 2.0°C down in heating) to prevent excessive cooling/heating and ensure a comfortable sleeping temperature.

#### To combine ON timer and OFF timer


- To set the timers, refer to "To start/stop ON timer operation" on page 8 and "To start/stop OFF timer operation" on page 8.

**Result:** ON and OFF are displayed on the LCD.

**Example:**

- If  is set when the unit is operating.

**Result:** Operation **stops** in 1 hour and then **starts** 7 hours later.

- If  is set when the unit is NOT operating.

**Result:** Operation **starts** in 2 hours and then **stops** 3 hours later.



## 6 Energy saving and optimum operation



### INFORMATION

- Even if the unit is turned OFF, it consumes electricity.
- When the power turns back on after a power break, the previously selected mode will be resumed.



### CAUTION

NEVER expose little children, plants or animals directly to the airflow.



### WARNING

Do NOT place objects below the indoor and/or outdoor unit that may get wet. In this condition, condensation on the main unit or refrigerant pipes, air filter dirt or drain blockage may cause dripping. This results in fouling or failure of the object which is located beneath the unit.



### NOTICE

Do NOT use the system for other purposes. In order to avoid any quality deterioration, do NOT use the unit for cooling precision instruments, food, plants, animals, or works of art.



### CAUTION

Do NOT operate the system when using a room fumigation-type insecticide. Chemicals could collect in the unit, and endanger the health of people who are hypersensitive to chemicals.



### WARNING

Do NOT place a flammable spray bottle near the air conditioner and do NOT use sprays. Doing so may result in a fire.

Observe the following precautions to ensure the system operates properly.

- Prevent direct sunlight from entering a room during cooling operation by using curtains or blinds.
- Ventilate often. Extended use requires special attention to ventilation.
- Keep doors and windows closed. If the doors and windows remain open, air will flow out of your room causing a decrease in the cooling or heating effect.
- Be careful NOT to cool or heat too much. To save energy, keep the temperature setting at a moderate level.
- NEVER place objects near the air inlet or the air outlet of the unit. Doing so may cause a reduced heating/cooling effect or stop operation.
- Turn off the main power supply switch to the unit when the unit is NOT used for longer periods of time. If the main power supply switch is on, the unit consumes electricity. Before restarting the unit, turn on the main power supply switch 6 hours before operation to ensure smooth running.
- Condensation may form if the humidity is above 80% or if the drain outlet gets blocked.
- Adjust the room temperature properly for a comfortable environment. Avoid excessive heating or cooling. Notice that it may take some time for the room temperature to reach the set temperature. Consider using the timer setting options.
- Adjust the air flow direction to avoid cool air from gathering on the floor or warm air against the ceiling. (Up during cooling or dry operation to the ceiling and down during heating operation.)
- Avoid direct air flow to room inhabitants.

- Operate the system within the recommended temperature range (26~28°C for cooling and 20~24°C for heating) to save energy.

## 7 Maintenance and service

### 7.1 Overview: Maintenance and service

The installer has to perform a yearly maintenance.

#### About the refrigerant

This product contains fluorinated greenhouse gases. Do NOT vent gases into the atmosphere.

Refrigerant type: R32

Global warming potential (GWP) value: 675



### NOTICE

In Europe, the **greenhouse gas emissions** of the total refrigerant charge in the system (expressed as tonnes CO<sub>2</sub>-equivalent) is used to determine the maintenance intervals. Follow the applicable legislation.

**Formula to calculate the greenhouse gas emissions:**  
GWP value of the refrigerant × Total refrigerant charge [in kg] / 1000

Please contact your installer for more information.



### WARNING

The refrigerant inside the unit is mildly flammable, but normally does NOT leak. If the refrigerant leaks in the room and comes in contact with fire from a burner, a heater, or a cooker, this may result in fire, or the formation of a harmful gas.

Turn off any combustible heating devices, ventilate the room, and contact the dealer where you purchased the unit.

Do NOT use the unit until a service person confirms that the part from which the refrigerant leaked has been repaired.



### WARNING

- Do NOT pierce or burn refrigerant cycle parts.
- Do NOT use cleaning materials or means to accelerate the defrosting process other than those recommended by the manufacturer.
- Be aware that the refrigerant inside the system is odourless.



### WARNING

The appliance shall be stored in a room without continuously operating ignition sources (example: open flames, an operating gas appliance or an operating electric heater).



### NOTICE

Maintenance MUST be done by an authorized installer or service agent.

We recommend performing maintenance at least once a year. However, applicable legislation might require shorter maintenance intervals.



### DANGER: RISK OF ELECTROCUTION

To clean the air conditioner or air filter, be sure to stop operation and turn all power supplies off. Otherwise, an electric shock and injury may result.

## 7 Maintenance and service



### WARNING

To prevent electric shocks or fire:

- Do NOT rinse the unit.
- Do NOT operate the unit with wet hands.
- Do NOT place any objects containing water on the unit.



### CAUTION

After a long use, check the unit stand and fitting for damage. If damaged, the unit may fall and result in injury.



### CAUTION

Do NOT touch the heat exchanger fins. These fins are sharp and could result in cutting injuries.



### WARNING

Be careful with ladders when working in high places.

## 7.2 To clean the indoor unit and user interface



### NOTICE

- Do NOT use gasoline, benzene, thinner polishing powder or liquid insecticide. **Possible consequence:** Discoloration and deformation.
- Do NOT use water or air of 40°C or higher. **Possible consequence:** Discoloration and deformation.
- Do NOT use polishing compounds.
- Do NOT use a scrubbing brush. **Possible consequence:** The surface finishing peels off.




### DANGER: RISK OF ELECTROCUTION

Before cleaning, be sure to stop the operation, turn the breaker off or pull out the supply cord. Otherwise, an electric shock and injury may result.

- Clean with a soft cloth. If it is difficult to remove stains, use water or a neutral detergent.

## 7.3 To clean the front panel

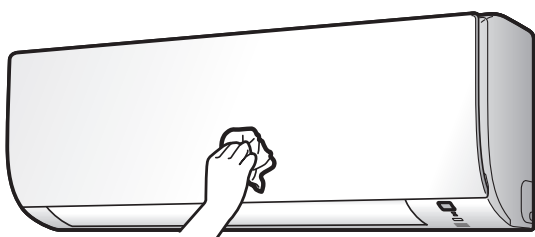

- Clean with a soft cloth. If it is difficult to remove stains, use water or a neutral detergent.

## 7.4 About the air filter

Operating the unit with dirty filters means that the filter:


- CANNOT deodorize the air,
- CANNOT clean the air,
- poor heating/cooling,
- causes odour.

To order titanium apatite deodorizing filters, contact your dealer.


Item	Part number
Titanium deodorizing filter (without frame) 1 set	KAF970A46

## 7.5 To clean the air filters


- Open the front panel.

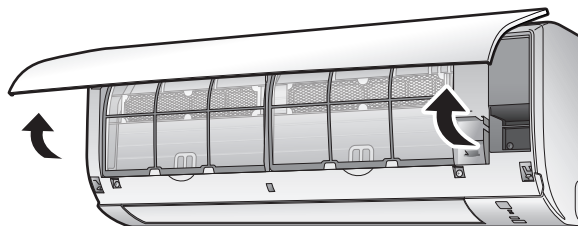


- Push the tab at the centre of each air filter, then pull it down.
- Pull out the air filters.

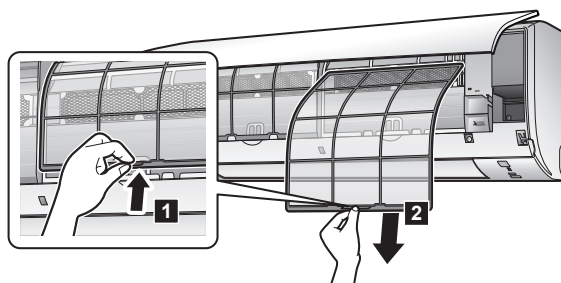

- Remove the titanium apatite deodorizing filter from the tabs.

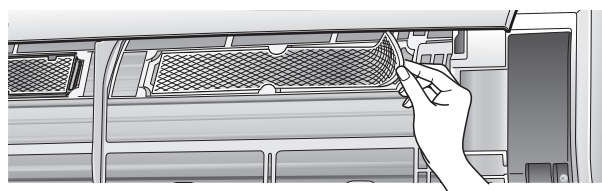


- Clean or replace each filter.
- Wash the air filters with water or clean them with a vacuum cleaner.



- Soak in lukewarm water for about 10 to 15 minutes.



- Set the air filters and the titanium apatite deodorizing filter back to their original position.
- Close the front panel by pushing the claws of the filter into the slots at 3 locations (left, right, middle).

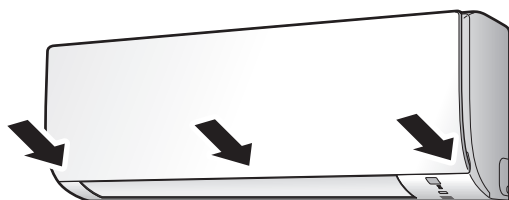**INFORMATION**


- If the dust does NOT come off easily, wash the air filters with a neutral detergent diluted in lukewarm water. Dry the air filters in the shade.
- Be sure to remove the titanium apatite deodorizing filter.
- It is recommended to clean the air filters every 2 weeks.

## 7.6 To clean the titanium apatite deodorizing filter

**INFORMATION**

- Replace the filter every 3 years.
- Clean the filter with water every 6 months.


- 1 Remove the dust from the filter with a vacuum cleaner and soak the filter for 10 to 15 minutes in warm water.

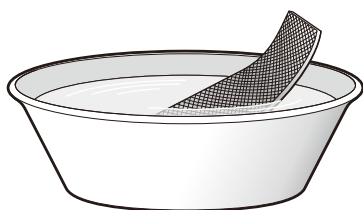

- 2 After washing, shake off remaining water and dry the filter in the shade. Do NOT wring out the filter when removing water.

## 7.7 To replace the titanium apatite deodorizing filter

- 1 Remove the filter from the tabs and prepare a new filter.

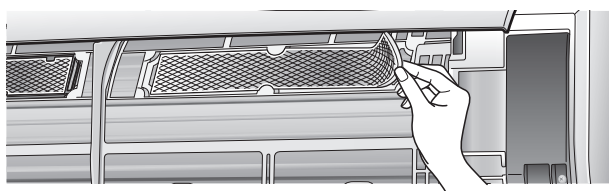**INFORMATION**

Dispose of the old filter as non-flammable waste.

## 7.8 To take following items into account before a long idle period

- 1 Set the mode to **fan only** by pressing **FAN ONLY** button to dry the inside of the unit.
- 2 After operation stops, turn the breaker off.
- 3 Clean the air filters and replace them in their original position.
- 4 Remove the batteries from the user interface.

**INFORMATION**

It is recommended to have periodical maintenance performed by a specialist. For specialist maintenance, contact your dealer. Maintenance costs shall be borne by the customer.

In certain operating conditions the inside of the unit may get dirty after several seasons of use. This results in poor performance.

## 8 Troubleshooting

If one of the following malfunctions occur, take the measures shown below and contact your dealer.

**WARNING**

**Stop operation and shut off the power if anything unusual occurs (burning smells etc.).**

Leaving the unit running under such circumstances may cause breakage, electric shock or fire. Contact your dealer.

The system **MUST** be repaired by a qualified service person:

Malfunction	Measure
If a safety device such as a fuse, a breaker or an earth leakage breaker frequently actuates or the ON/OFF switch does NOT properly work.	Turn OFF the main power switch.
If water leaks from the unit.	Stop the operation.
The operation switch does NOT work well.	Turn OFF the power supply.
If the user interface display indicates the unit number, the operation lamp flashes and the malfunction code appears.	Notify your installer and report the malfunction code.

If the system does NOT properly operate except for the above mentioned cases and none of the above mentioned malfunctions is evident, investigate the system according to the following procedures.

Malfunction	Measure
If the system does NOT operate at all.	<ul style="list-style-type: none"> <li>▪ Check if there is no power failure. Wait until power is restored. If a power failure occurs during operation, the system automatically restarts immediately after power is restored.</li> <li>▪ Check if no fuse has blown or breaker is activated. Change the fuse or reset the breaker if necessary.</li> <li>▪ Check the batteries of the user interface.</li> </ul>
The system suddenly stops operating.	<ul style="list-style-type: none"> <li>▪ Check if the air inlet or outlet of the outdoor or indoor unit is NOT blocked by obstacles. Remove any obstacles and make sure the air can flow freely.</li> <li>▪ The air conditioner may stop operating after sudden large voltage fluctuations to protect the system. It automatically resumes operation after about 3 minutes.</li> </ul>

## 8 Troubleshooting

Malfunction	Measure
The system operates, but cooling or heating is insufficient.	<ul style="list-style-type: none"> <li>Check the airflow rate setting. Refer to <a href="#">"5.3.2 Airflow rate" on page 6</a>.</li> <li>Check the temperature setting. Refer to <a href="#">"5.3.1 To start/stop operation and to set the temperature" on page 6</a>.</li> <li>Check if the airflow direction setting is appropriate. Refer to <a href="#">"5.3.3 Airflow direction" on page 7</a>.</li> <li>Check if the air inlet or outlet of outdoor or indoor unit is NOT blocked by obstacles. Remove any obstacles and make sure the air can flow freely.</li> </ul>
The system operates but cooling or heating is insufficient (air is NOT blown from the unit).	<ul style="list-style-type: none"> <li>The air conditioner may be warming up for heat operation. Wait for about 1 to 4 minutes.</li> <li>The unit may be in defrost operation.</li> </ul>
The system operates, but cooling or heating is insufficient (air is blown from the unit).	<ul style="list-style-type: none"> <li>Check if the air filters are clogged. Clean the air filters. See <a href="#">"7 Maintenance and service" on page 9</a>.</li> <li>Check for open doors or windows. Close doors and windows to prevent wind from coming in.</li> <li>Check if the unit operates in Econo operation. Refer to <a href="#">"5.3.6 Econo operation" on page 8</a>.</li> <li>Check if there is any furniture directly under or next to the indoor unit. Move the furniture.</li> </ul>
An abnormal function happens during operation.	The air conditioner may malfunction because of lightning or radio waves. Turn the breaker OFF and back ON.
The unit does NOT receive signals from the user interface.	<ul style="list-style-type: none"> <li>Check the batteries of the user interface.</li> <li>Check if the transmitter is NOT exposed to direct sunlight.</li> <li>Check if there are any electronic starter type fluorescent lamps in the room. Contact your dealer.</li> </ul>
The user interface display is blank.	Replace the batteries of the user interface.
An error code is displayed on the user interface.	Consult your local dealer. Refer to <a href="#">"8.2 Solving problems based on error codes" on page 12</a> for a detailed list of error codes.
Other electric appliances start to operate.	If the user interface signals operate other electric appliances, move the other appliances away, and contact your dealer.

If after checking all above items, it is impossible to fix the problem yourself, contact your installer and state the symptoms, the complete model name of the unit (with manufacturing number if possible) and the installation date (possibly listed on the warranty card).

### 8.1 Symptoms that are NOT system malfunctions

The following symptoms are NOT system malfunctions:

#### 8.1.1 Symptom: A sound like water flowing is heard

- This sound is caused by the refrigerant flowing in the unit.
- This sound may be generated when water is flowing away from the unit during cooling or drying operation.

#### 8.1.2 Symptom: A blowing sound is heard

This sound is generated when the direction of the refrigerant flow is changed (e.g. when switching from cooling to heating).

#### 8.1.3 Symptom: A ticking sound is heard

This sound is generated when the unit slightly expands or contracts with changes in temperature.

#### 8.1.4 Symptom: A whistling sound is heard

This sound is generated by the refrigerant flowing during defrost operation.

#### 8.1.5 Symptom: A clicking sound during operation or idle time is heard

This sound is generated when the refrigerant control valves or electrical parts operate.

#### 8.1.6 Symptom: A clapping sound is heard

This sound is generated when an external device sucks air out of the room (e.g. exhaust fan, extractor hood) while the doors and windows in the room are closed. Open the doors or windows, or turn off the device.

#### 8.1.7 Symptom: The units can give off odours

The unit can absorb the smell of rooms, furniture, cigarettes, etc., and then emit it again.

#### 8.1.8 Symptom: The outdoor fan rotates while the air conditioner is not in operation

- After operation has stopped.** The outdoor fan continues to rotate for another 30 seconds for system protection.
- While the air conditioner is not in operation.** When the outdoor temperature is very high, the outdoor fan starts to rotate for system protection.

### 8.2 Solving problems based on error codes

When a problem happens, an error code appears on the user interface. It is important to understand the problem and to take measures before resetting the error code. This should be done by a licensed installer or by your local dealer.




This chapter gives you an overview of all error codes and the content of the error code as it appears on the user interface.

For a more detailed troubleshooting guideline for each error, please see the service manual.

#### Fault diagnosis by user interface

The user interface can receive an error code from the indoor unit referring to the fault. It is important to understand the problem and take measures before resetting the error code. This should be done by a licensed installer or your local dealer.

To see the error code on the user interface:

- Hold  for about 5 seconds.  
**Result:**  blinks in the temperature display section.
- Press  repeatedly until a continuous beep is heard.  
**Result:** The code is now displayed on the display.

**INFORMATION**

- A short beep and 2 consecutive beeps indicate non-corresponding codes.
- To cancel the code display, hold the **CANCEL** cancel button for 5 seconds. The code will also disappear from the display if the button is NOT pressed within 1 minute.

**System**

Error code	Description
00	Normal
U0	Refrigerant shortage
U2	Overvoltage detection
U4	Signal transmission error (between indoor and outdoor unit)
UR	Indoor/outdoor unit combination fault

**Indoor unit**

Error code	Description
R1	Indoor unit PCB abnormality
R5	Freeze-up protection or high-pressure control
R6	Fan motor (DC motor) abnormality
C4	Indoor heat exchanger thermistor abnormality
C9	Room temperature thermistor abnormality

**Outdoor unit**

Error code	Description
ER	4-way valve abnormality
E1	Outdoor unit PCB abnormality
E5	Overload activation (compressor overload)
E6	Compressor lock
E7	DC fan lock
E8	Input power overcurrent
F3	Discharge pipe temperature control
F6	High-pressure control (in cooling)
H0	Compressor system sensor abnormality
H6	Position sensor abnormality
H8	DC voltage / current sensor abnormality
H9	Outdoor temperature thermistor abnormality
J3	Discharge pipe thermistor abnormality
J6	Outdoor heat exchanger thermistor abnormality
L3	Electrical parts heat error
L4	Radiation fin temperature rise
L5	Inverter instantaneous overcurrent (DC)
P4	Radiation fin thermistor abnormality

## 9 Disposal

**NOTICE**

Do NOT try to dismantle the system yourself: the dismantling of the system, treatment of the refrigerant, oil and other parts MUST comply with applicable legislation. Units MUST be treated at a specialised treatment facility for reuse, recycling and recovery.

## 10 Glossary

**DHW = Domestic hot water**

Hot water used, in any type of building, for domestic purposes.

**LWT = Leaving water temperature**

Water temperature at the water outlet of the heat pump.

**Dealer**

Sales distributor for the product.

**Authorized installer**

Technical skilled person who is qualified to install the product.

**User**

Person who is owner of the product and/or operates the product.

**Applicable legislation**

All international, European, national and local directives, laws, regulations and/or codes that are relevant and applicable for a certain product or domain.

**Service company**

Qualified company which can perform or coordinate the required service to the product.

**Installation manual**

Instruction manual specified for a certain product or application, explaining how to install, configure and maintain it.

**Operation manual**

Instruction manual specified for a certain product or application, explaining how to operate it.

**Accessories**



Labels, manuals, information sheets and equipment that are delivered with the product and that need to be installed according to the instructions in the accompanying documentation.

**Optional equipment**


Equipment made or approved by Daikin that can be combined with the product according to the instructions in the accompanying documentation.

**Field supply**

Equipment NOT made by Daikin that can be combined with the product according to the instructions in the accompanying documentation.

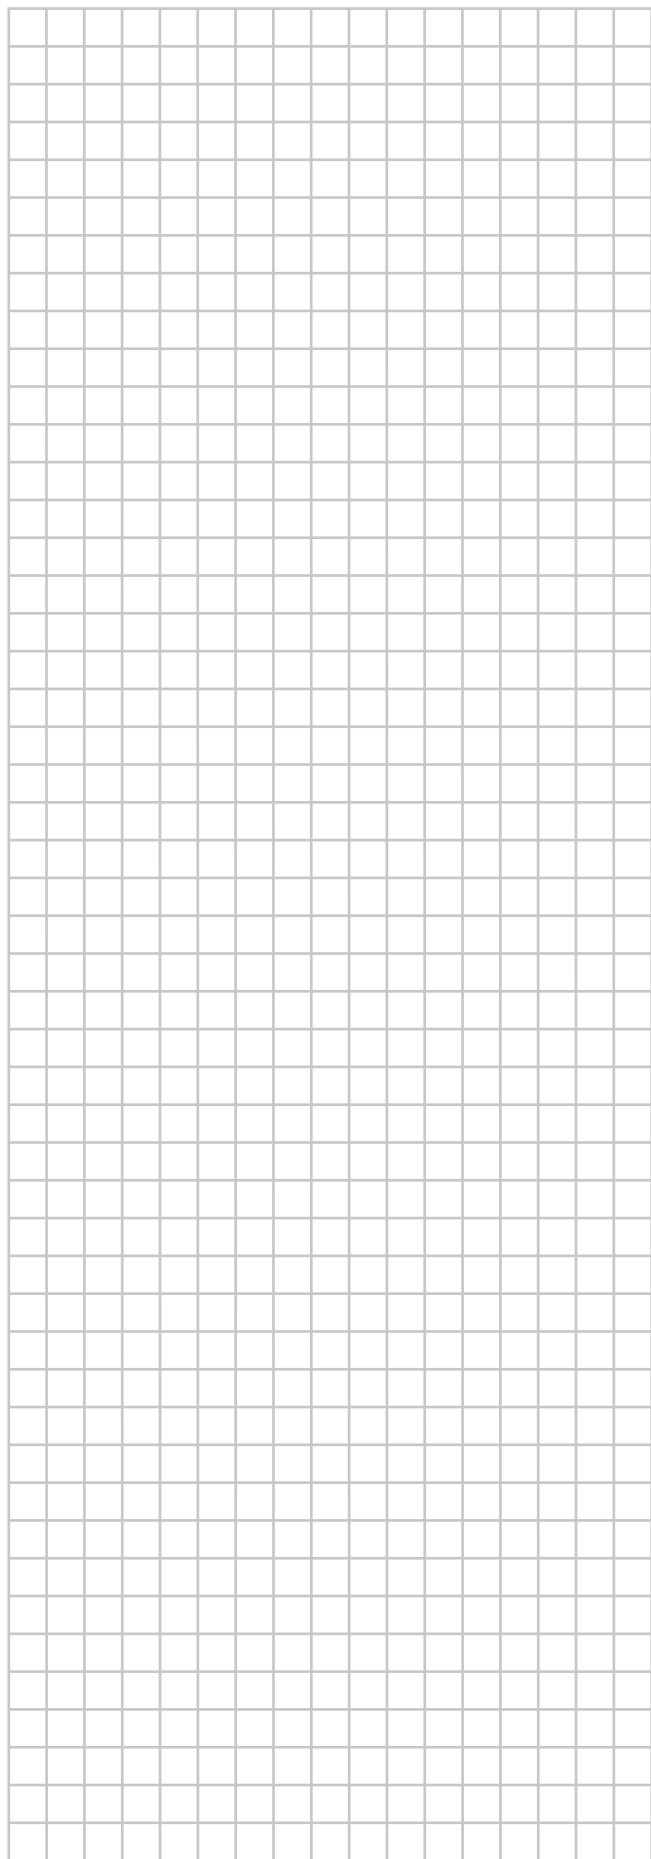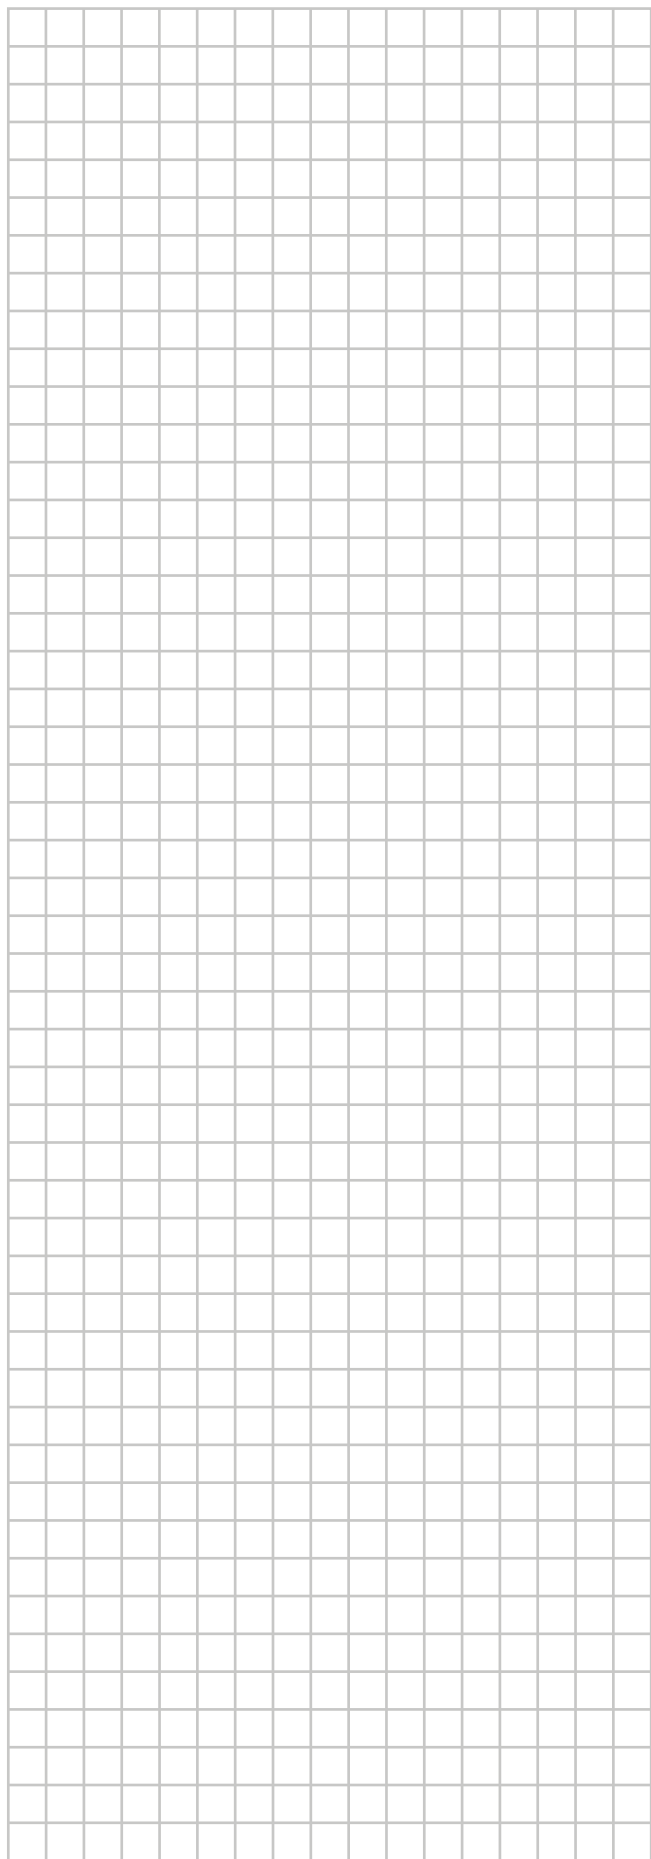



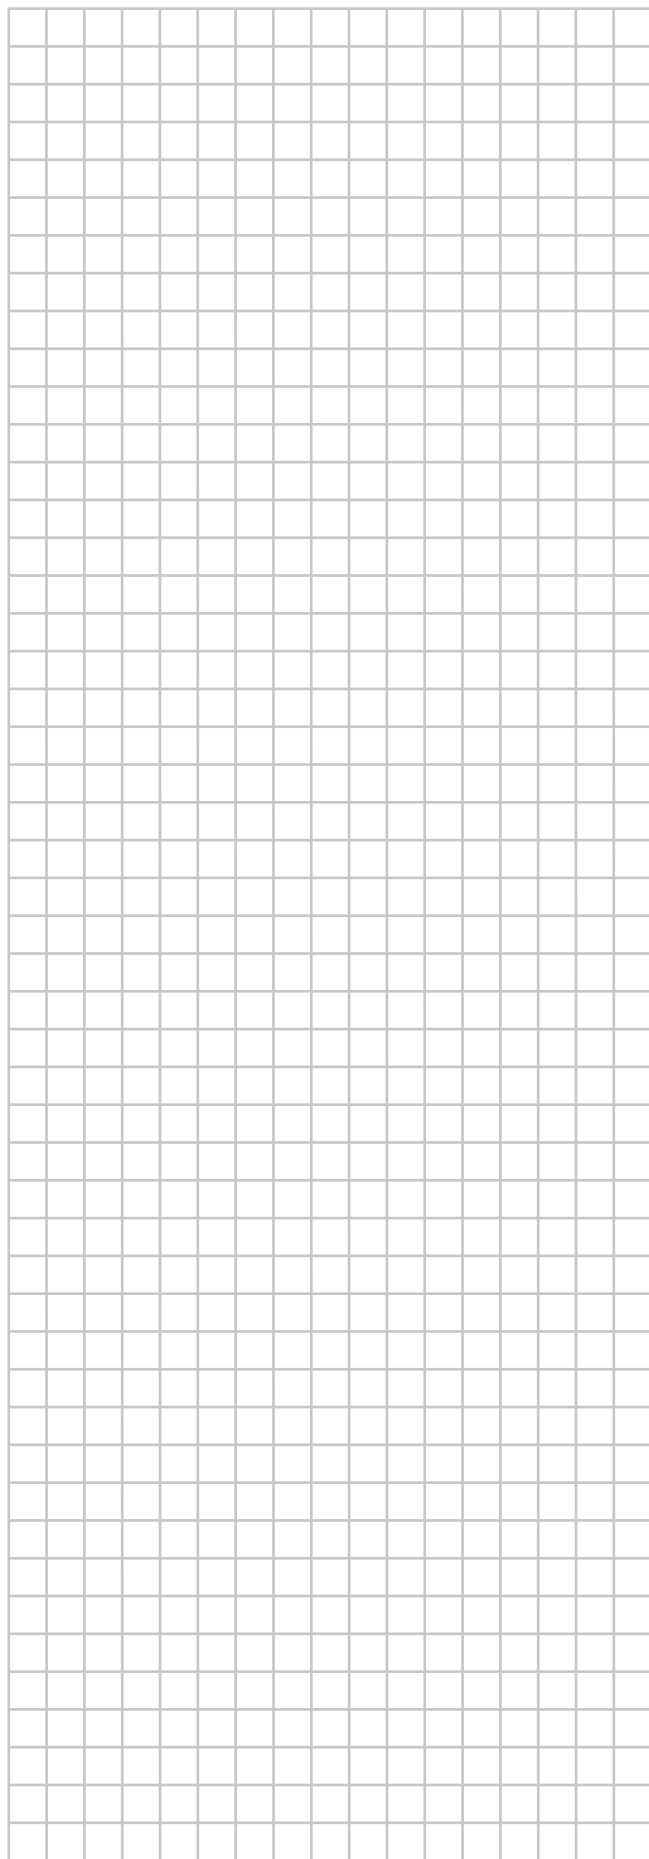



**DAIKIN INDUSTRIES CZECH REPUBLIC s.r.o.**

U Nové Hospody 1/1155, 301 00 Plzeň Skvrňany, Czech Republic

**DAIKIN EUROPE N.V.**

Zandvoordestraat 300, B-8400 Oostende, Belgium